



REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
A0		2006/11/25	

# 1. 00mm (0. 039") PIN HEADER, SINGLE ROW, STRAIGHT H=1. 0mm

## SPECIFICATIONS

Current Rating: 0. 75AMP  
 Withstanding Voltage: 500V AC/minute  
 Contact Resistance: 30mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°Cto+105°C

Contact Material: Brass  
 Contact plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T+30%G.F

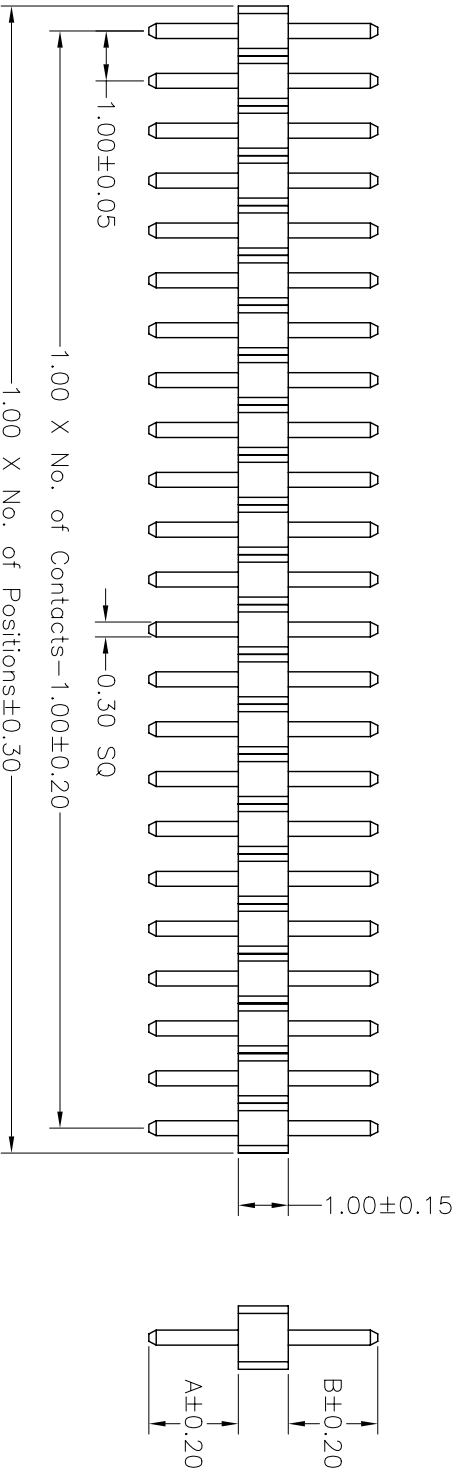


## Ordering Information

1510-1 1 XX XX S XXX 01

- No. of Pins per Row: 01-50
- Contact Plating: G0=Gold Flash, G1=3u"Gold, G2=5u"Gold, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
- Contact length Standard=4.6mm
- SN=Gold Flash/Tin, S1=3u"Gold/Tin, S2=5u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin

### Recommended PCB Board Hole Layout



ITEM	A	B
Standard 1	1.80	1.80
Alternate		

公差 (TOLERANCE)		绘图 (DRAWN)		投影 (PROJECT)		料号 (PART NO)		发行编号 (Issue No)	
X. ± 5°	X.	韦翔丹		MM	MM	1510-11XXXXSXXX01	1/1		
.X ± 2°	.X ± 0.50	校对 (CHECKED)		比例 (SCALE)	6:1				
.XX ± 1°	.XX ± 0.25	核准 (APPROVE)		版本 (EDITION)	A0	品名 (NAME)	1.00排针 单排 180度 H=1.00		
.XXX ± 0.5°	.XXX ± 0.12			日期 (DATE)	06-11-25				

# ZYSZ INDUSTRY CO., LTD