

REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
AO		2006/11/25	

1.00*1.00mm (0.039"*0.039") PIN HEADER, DUAL ROW, SMT H=1.0mm

SPECIFICATIONS




Current Rating: 0.75AMP
 Withstanding Voltage: 500V AC/minute
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass

Contact plating: Au or Sn Over Ni

Insulator Material: Black Polyester (UL94V-0)


Standard: PA6T+30% G.F

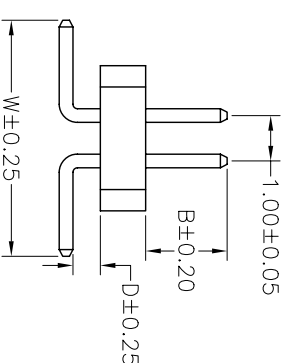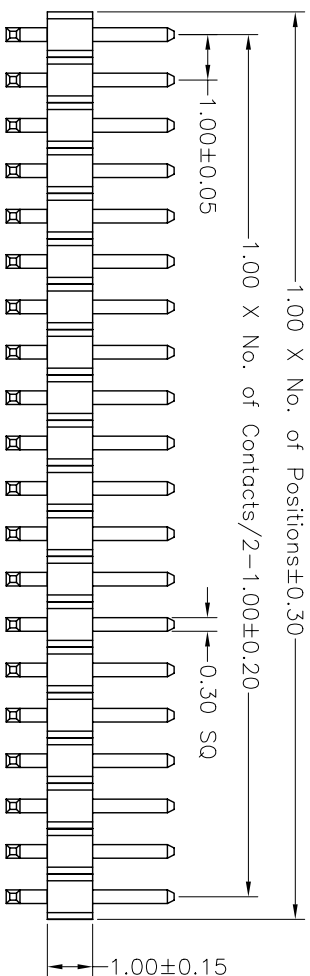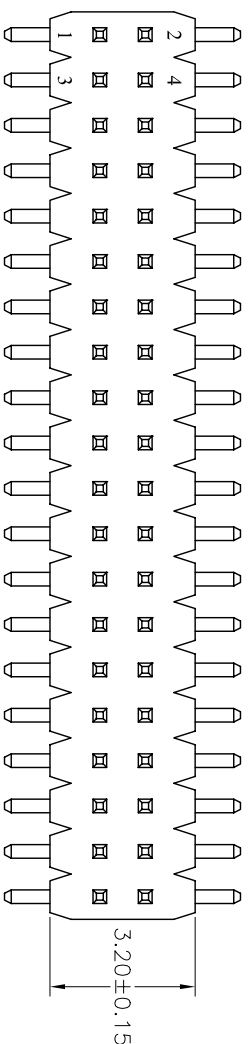

Ordering Information

1510-1 2 XX XX M XXX 01

No. of Pins per Row: 01~50
 Contact Plating: G0=Gold Flash, G1=3u"Gold, G2=5u"Gold, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
 Contact length Standard=5.0mm
 S0=Gold Flash/Tin, S1=3u"Gold/Tin, S2=5u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin

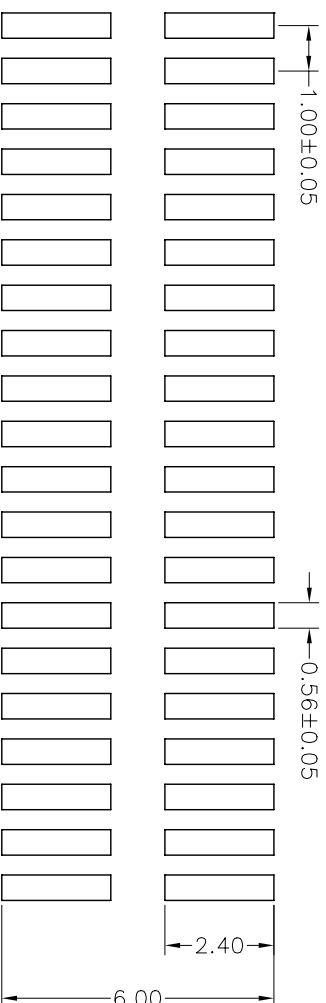

Dimension antitheses list			
ITEM	W	B	D
Standard 1	5.20	1.80	0
Alternate			

Recommended PCB Board Layout

公差 (TOLERANCE)		绘图 (DRAWN)		投影 (PROJECT)		料号 (PART NO)		发行编号 (Issue No)	
X. ± 5°	X.	韦翔丹		MM	MM	1510-12XXXXXX01			
.X ± 2°	.X ± 0.50	校对 (CHECKED)		6:1	(DRAW NO)			页次 (PAGE)	
.XX ± 1°	.XX ± 0.25	核准 (APPROVE)		A0	品名 (NAME)	1.00排针 双排 SMT H=1.00		1/1	
.XXX ± 0.5°	.XXX ± 0.12			06-11-25	日期 (DATE)				

ZYSZ INDUSTRY CO., LTD