




REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
A0		2006/11/25	

1.00*1.00mm (0.039"*0.039") PIN HEADER, DUAL ROW, SMT WITH LOCATING PEG H=1.0mm

SPECIFICATIONS

Current Rating: 0.75AMP
 Withstanding Voltage: 500V AC/minute
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C


Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Black Polyester (UL94V-0)
 Standard: PA6T+30%G.F

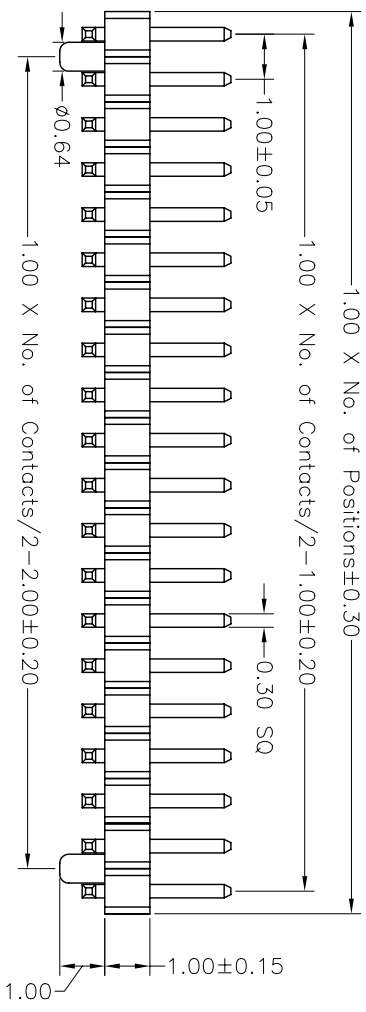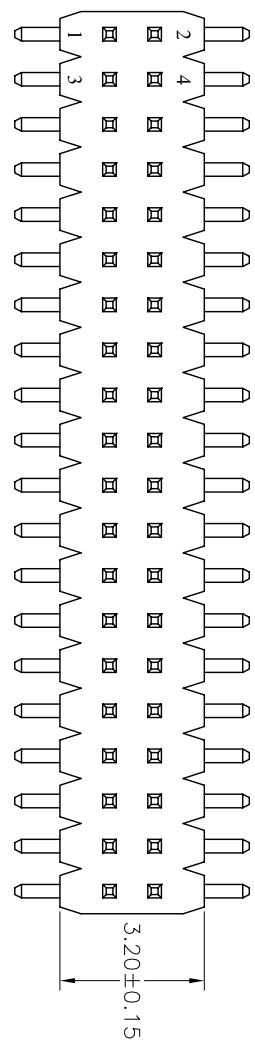

Ordering Information

1510-1 2 XX XX M XXX 02

No. of Pins per Row: 01-40
 Contact Plating: G0=Gold Flash, G1=3u"Gold, G2=5u"Gold, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
 Contact length Standard=5.0mm
 SN=Gold Flash/Tin, S1=3u"Gold/Tin, S2=5u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin

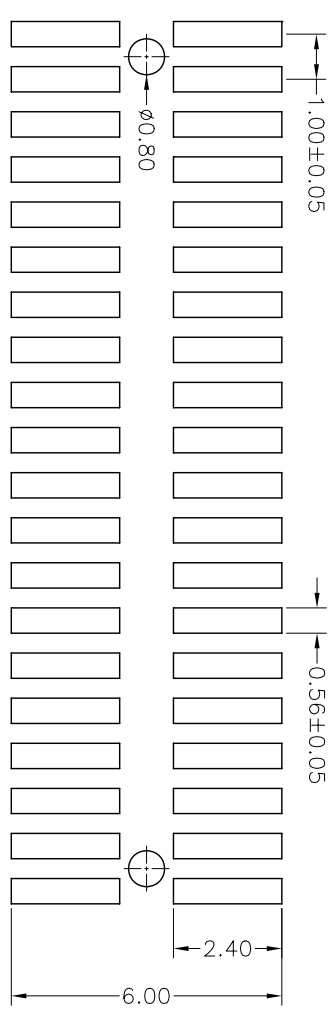

Recommended PCB Board Layout

Dimension antitheses list			
ITEM	W	B	D
Standard 1	5.20	1.80	0
Alternate			

ZYSZ INDUSTRY CO., LTD

公差 (TOLERANCE)		绘图 (DRAWN)		投影 (PROJECT)		料号 (PART NO)		发行编号 (Issue No)	
X. ± 5°	X.	韦翔丹	核校 (CHECKED)	MM	6:1	1510-12XXXXMXXXX02	1/1		
.X ± 2°	.X ± 0.50	日期 (DATE)	核准 (APPROVE)	A0	06-11-25				
.XX ± 1°	.XX ± 0.25								
.XXX ± 0.5°	.XXX ± 0.12								

1.00排针 双排 SMT H=1.00 带内柱