

REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
A0		2006/11/27	

1.00*1.00mm (0.039"*0.039") PIN HEADER, DUAL ROW, STRAIGHT
H=1.0mm

SPECIFICATIONS

Current Rating: 0.75AMP
Withstanding Voltage: 500V AC/minute
Contact Resistance: 30mΩ Max
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

Contact Material: Brass

Contact plating: Au or Sn Over Ni

Insulator Material: Polyester (UL94V-0)





Standard: PA6T+30%G.F

Ordering Information

1510-12 XX XX S XXX 01

No. of Pins per Row: 01~50 Contact Plating Contact length Standard=4.6mm

G0=Gold Flash
G1=3u"Gold
G2=5u"Gold
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
S0=Gold Flash/Tin
S1=3u"Gold/Tin
S2=5u"Gold/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
SN=Tin

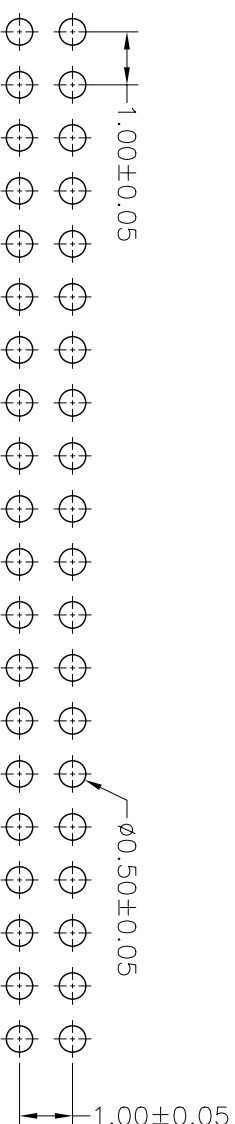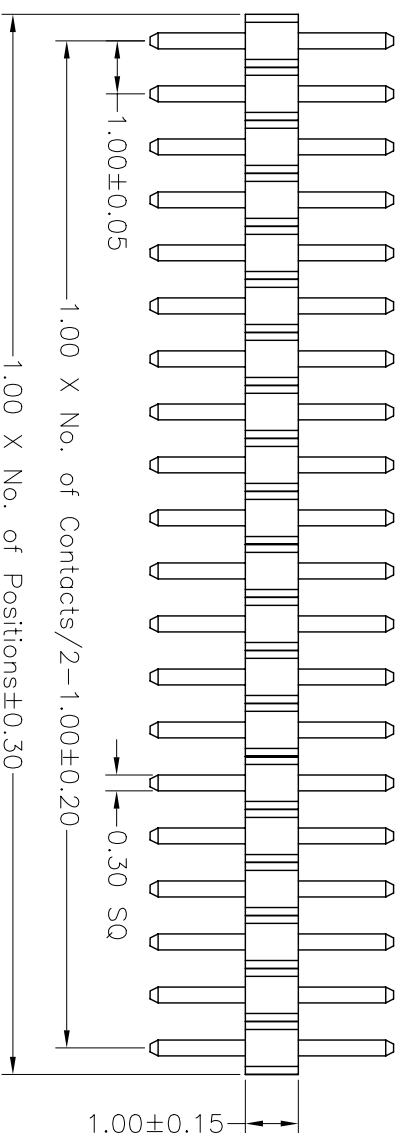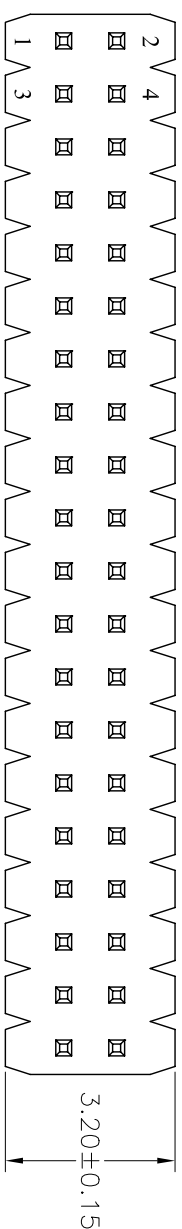

Recommended PCB Board Hole Layout

Dimension antitheses list		
ITEM	A	B
Standard 1	1.80	1.80
Alternate		

公差 (TOLERANCE)		绘图 (DRAWN)		投影 (PROJECT)		料号 (PART NO)		发行编号 (Issue No)	
X.	± 5°	X.	± 0.50	单位 (UNIT)	MM	比例 (SCALE)	6:1	图号 (DRAW NO)	页次 (PAGE)
.X	± 2°	.X	± 0.50	校对 (CHECKED)		版本 (EDITION)	A0		1/1
.XX	± 1°	.XX	± 0.25	核准 (APPROVE)		日期 (DATE)	06-11-27	品名 (NAME)	
.XXX	± 0.5°	.XXX	± 0.12						

ZYSZ INDUSTRY CO., LTD

1.00排针 双排 180度 H=1.00