

REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
A0		200/11/27	

1. 00mm (0.039") SPACER SINGLE, SINGLE ROW, STRAIGHT H=1.0mm

SPECIFICATIONS



Current Rating: 0.75AMP
 Withstanding Voltage: 500V AC/minute
 Contact Resistance: 30mΩ Max
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass

Contact plating: Au or Sn Over Ni

Insulator Material: Polyester (UL94V-0)

Standard: PA6T+30% G.F

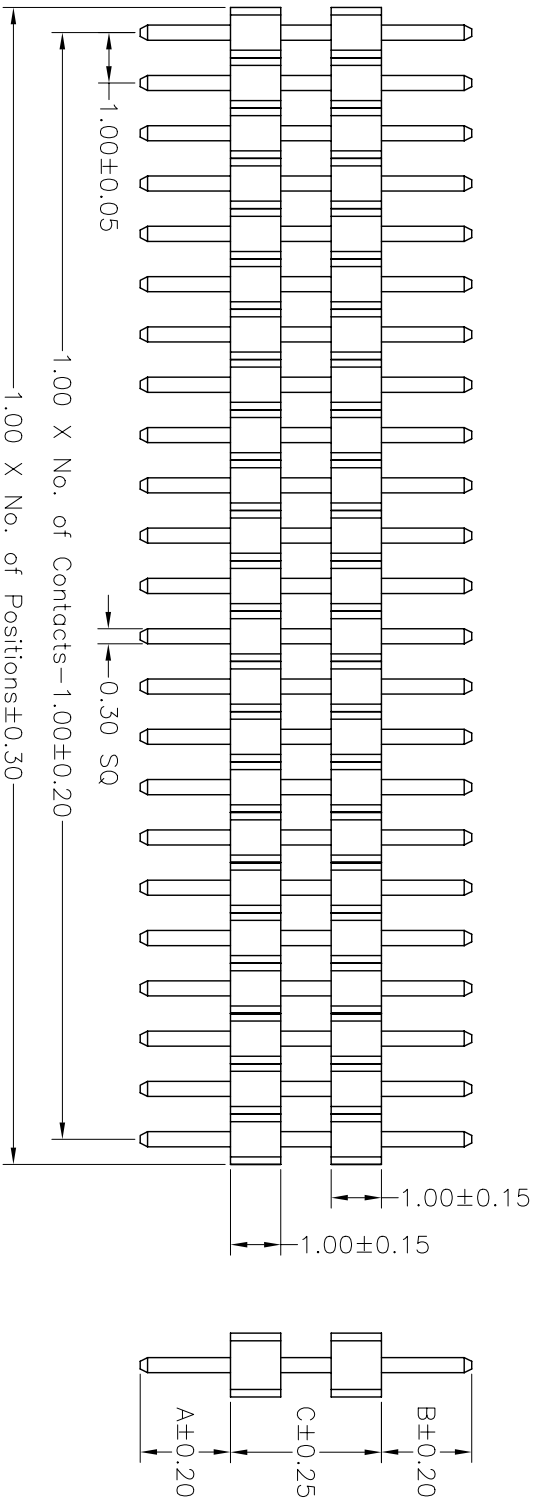

Ordering Information

1510-2 1 XX XX S XXX 01

No. of Pins per Row: 01-50
 Contact Plating: G0=Gold Flash, G1=3μ"Gold, G2=5μ"Gold, G3=10μ"Gold, G4=15μ"Gold, G5=30μ"Gold
 Contact length: 040-120
 S0=Gold Flash/Tin, S1=3μ"Gold/Tin, S2=5μ"Gold/Tin, S3=10μ"Gold/Tin, S4=15μ"Gold/Tin, S5=30μ"Gold/Tin, SN=Tin



Recommended PCB Board Hole Layout

Dimension antitheses list			
ITEM	A	B	C
Standard	1.80	1.80	
Alternate			

公差 (TOLERANCE)		绘图 (DRAWN)		韦翔丹		投影 (PROJECT)		料号 (PART NO)		发行编号 (Issue No)	
X.	± 5°	X.				单位 (UNIT)	MM	图号 (DRAW NO)	1510-21XXXXSSXXX01	页次 (PAGE)	
.X	± 2°	.X	± 0.50	校对 (CHECKED)		比例 (SCALE)	6:1				
.XX	± 1°	.XX	± 0.25	核准 (APPROVE)		版本 (EDITION)	A0	品名 (NAME)	1.00排针 单排双塑 180度 H=1.00		
.XXX	± 0.5°	.XXX	± 0.12			日期 (DATE)	06-11-27				

ZYSZ INDUSTRY CO., LTD