




# 1.00\*1.00mm (0.039" \* 0.039") SPACER SINGLE, DUAL ROW, STRAIGHT

H=1.0mm

## SPECIFICATIONS

- Current Rating: 0.75AMP
- Withstanding Voltage: 500V AC/minute
- Contact Resistance: 30mΩ Max
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Black Polyester (UL94V-0)  
 Standard: PA6T+30% G.F

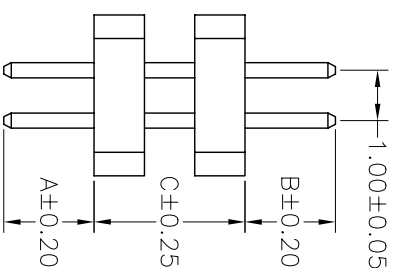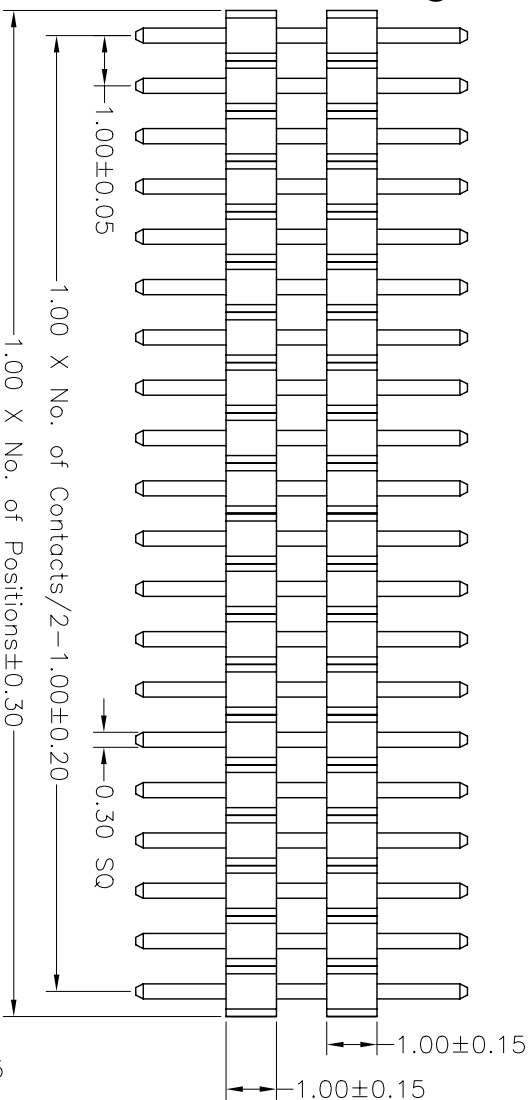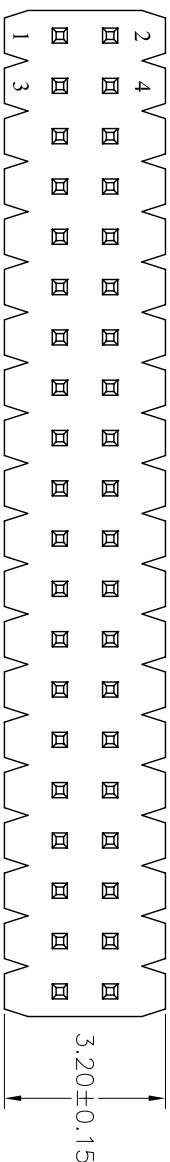


## Ordering Information

1510-2 2 XX XX S XXX 01

No. of Pins per Row: 01~50      Contact Plating      Contact length  
 G0=Gold Flash      040-120

- G1=3u"Gold
- G2=5u"Gold
- G3=10u"Gold
- G4=15u"Gold
- G5=30u"Gold
- S0=Gold Flash/Tin
- S1=3u"Gold/Tin
- S2=5u"Gold/Tin
- S3=10u"Gold/Tin
- S4=15u"Gold/Tin
- S5=30u"Gold/Tin
- SN=Tin

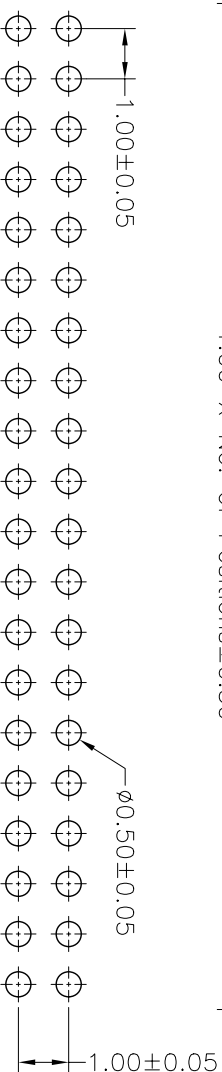

Dimension antitheses list			
ITEM	A	B	C
Standard	1.80	1.80	
Alternate			

## Recommended PCB Board Hole Layout

公差 (TOLERANCE)		绘图 (DRAWN)		投影 (PROJECT)		料号 (PART NO)		发行编号 (Issue No)	
X.	± 5°	X.		单位 (UNIT)	MM	图号 (DRAW NO)	1510-22XXXXXXX01	页次 (PAGE)	1/1
.X	± 2°	.X	± 0.50	比例 (SCALE)	6:1	品名 (NAME)	1.00排针 双排双塑 180度 H=1.00		
.XX	± 1°	.XX	± 0.25	版本 (EDITION)	A0				
.XXX	± 0.5°	.XXX	± 0.12	日期 (DATE)	06-11-27				

# ZYSZ INDUSTRY CO., LTD

REVISION DATA		
ITEM	DESCRIPTION	DATE
A0		2006/11/27