


REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
A0		2006/11/27	

1. 27mm (0.050") PIN HEADER, SINGLE ROW, SMT H=0.65mm


SPECIFICATIONS

Current Rating: 1AMP
 Withstanding Voltage: 500V AC/minute
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40C to +105C


Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Black Polyester (UL94V-0)
 Standard: Pa6T+30% G. F

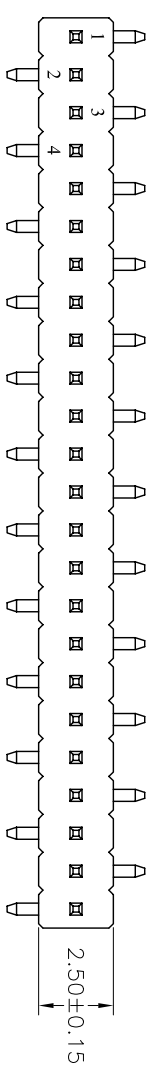

Type 2

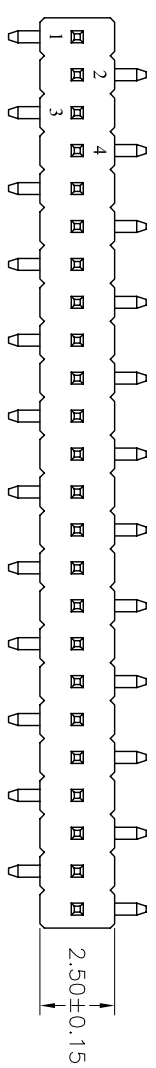

Type 1

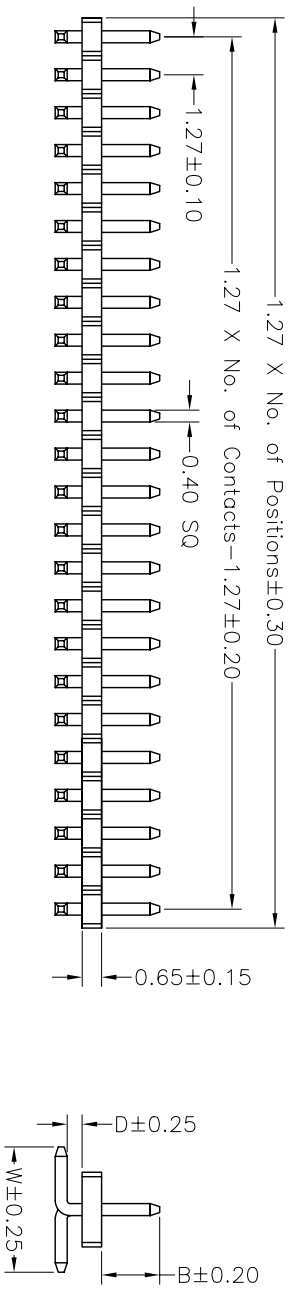

Type 1 Recommended PCB Board Layout **Type 2**

Dimension antitheses list			
ITEM	B	D	W
Standard 1	1.80	0	4.20
Standard 2	3.00	0	4.20
Standard 3	4.00	0	4.20
Alternate			

Ordering Information

1306-1 1 XXX XX M XXX 0X

No. of Pins per Row: 01~50
 Contact Plating: G0=Gold Flash, G1=3u"Gold, G2=5u"Gold, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S1=3u"Gold/Tin, S2=5u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin
 Contact length: Standard 1=4.5mm, Standard 2=5.8mm, Standard 3=6.8mm

公差 (TOLERANCE)		绘图 (DRAWN)		韦翔丹		投影 (PROJECT)		料号 (PART NO)		发行编号 (Issue No)	
X. ± 5°	X.	校对 (CHECKED)		单位 (UNIT)	MM	比例 (SCALE)	4:1	图号 (DRAW NO)	1306-12XXXXMXXXXXX	页次 (PAGE)	1/1
.X ± 2°	.X ± 0.50	核准 (APPROVE)		版本 (EDITION)	A0	日期 (DATE)	06-11-27	品名 (NAME)	1.27排针 单排 SMT H=0.65		
.XX ± 1°	.XX ± 0.25										
.XXX ± 0.5°	.XXX ± 0.12										

ZYSZ INDUSTRY CO., LTD