REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
A0	———————	2006/11/27	

1.27*1.27mm(0.050"*0.050")PIN HEADER,DUAL ROW STRAIGHT H=0.85mm

SPECIFICATIONS

Current Rating: 1AMP
Withstanding Voltage: 500V AC/minute
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40℃to+105℃

Contact Material: Brass
Contact plating: Au or Sn Over Ni
Insulator Material: Polyester(UL94V-0)
Standard: PA6T+30%G.F

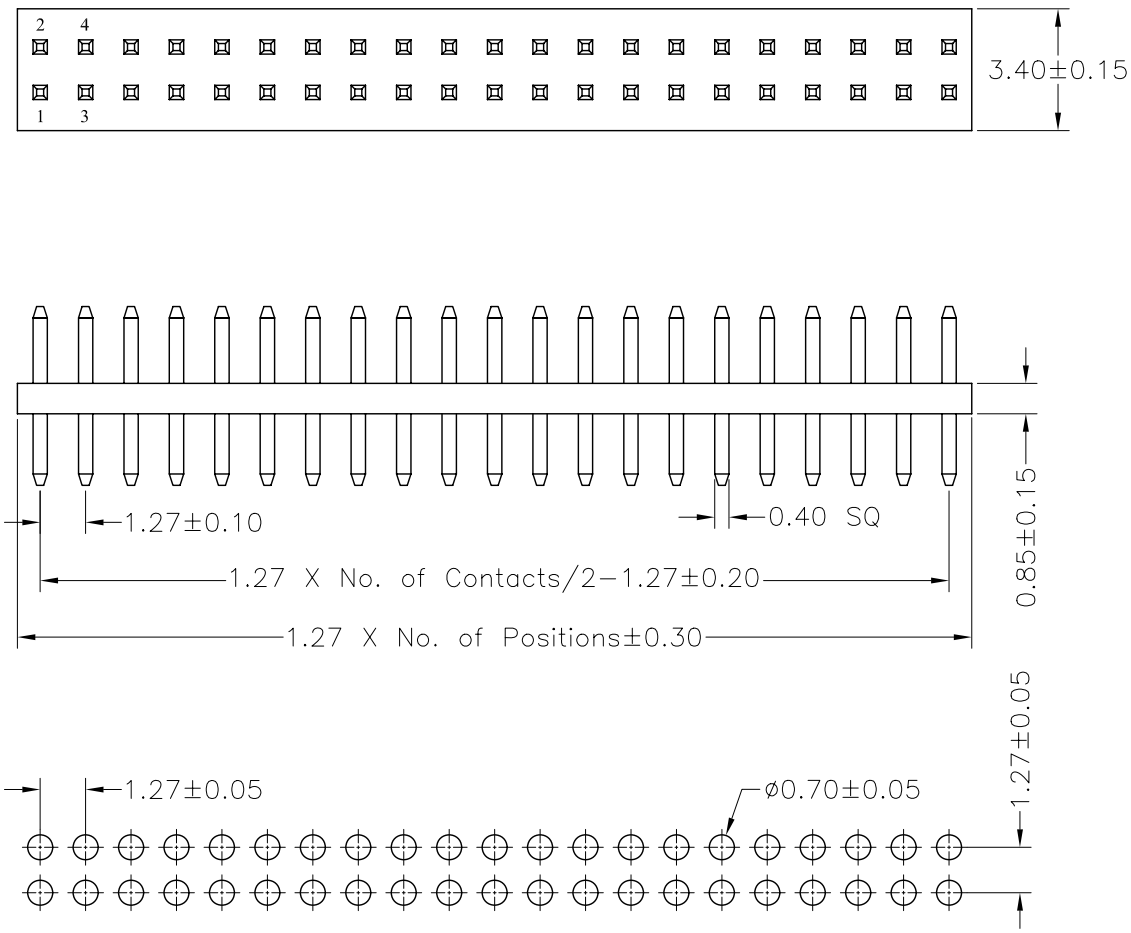

Recommended PCB Board Hole Layout

Ordering Information

1308-1 2 XX XX S XXX 01

No.of Pins per Row: 01~40	Contact Plating	Contact length
	G0=Gold Flash	Standard 1=4.5mm
	G1=3u"Gold	Standard 2=5.6mm
	G2=5u"Gold	Standard 3=6.6mm
	G3=10u"Gold	
	G4=15u"Gold	
	G5=30u"Gold	
	S0=Gold Flash/Tin	
	S1=3u"Gold/Tin	
	S2=5u"Gold/Tin	
	S3=10u"Gold/Tin	
	S4=15u"Gold/Tin	
	S5=30u"Gold/Tin	
	SN=Tin	

Dimension antitheses list		
ITEM	A	B
Standard 1	1.80	1.80
Standard 2	1.80	3.00
Standard 3	1.80	4.00
Alternate		

ZYSZ INDUSTRY CO.,LTD

公差（TOLERNCE）		绘图(DRAWN)	韦翔丹	投影(PROJECT)		料号(PART NO)	1308-12XXXXSXXX01	发行编号(Issue No)	
X. ±3°	X.			单位(UNIT)	MM				
.X ±2°	.X ±0.50	校对(CHECKED)		比例(SCALE)	4:1	图号(DRAW NO)		页次(PAGE)	1/1
.XX ±1°	.XX ±0.25			版本(EDITION)	A0				
.XXX ±0.5°	.XXX ±0.12	核准(APPROVE)		日期(DATE)	06-11-27	品名(NAME)	1.27排针 双排 180度 H=0.85		