




REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
A0		2006/11/27	

1. 27*1. 27mm (0. 050"*0. 050") PIN HEADER, DUAL ROW, RIGHT ANGLE
H=1. 0mm

SPECIFICATIONS

Current Rating: 1AMP
Withstanding Voltage: 500V AC/minute
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C


Contact Material: Brass
Contact plating: Au or Sn Over Ni
Insulator Material: Polyester (UL94V-0)
Standard: PA6T+30% G. F

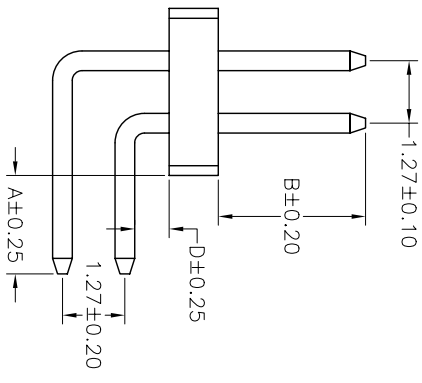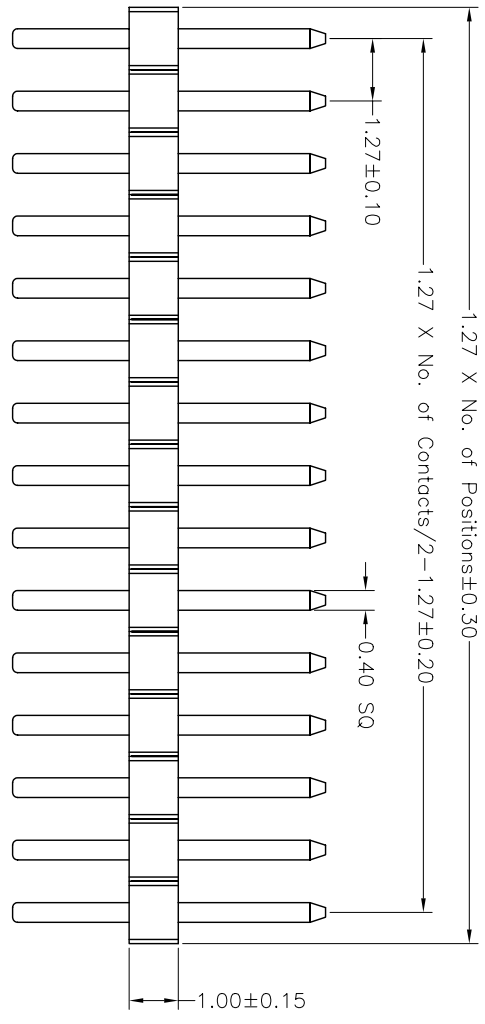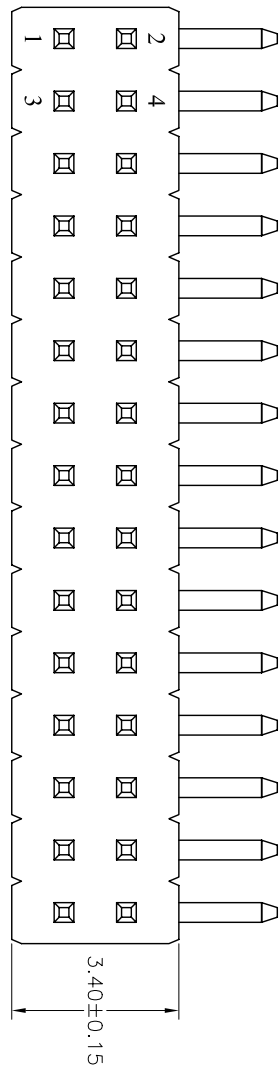

Ordering Information

1310-1 2 XX XX R XXX 01

No. of Pins per Row: 01~40
Contact Plating: GP=Gold Flash, G1=3u"Gold, G2=5u"Gold, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
Contact length: Standard(short) 1=5.6mm, Standard(short) 2=7.0mm, Standard(short) 3=7.8mm
SN=Ti

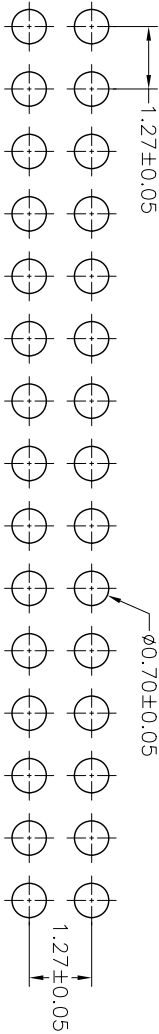

Recommended PCB Board Hole Layout

Dimension antitheses list			
ITEM	A	B	D
Standard 1	1.80	1.80	0
Standard 2	2.00	3.00	0
Standard 3	1.80	4.00	0
Alternate			

公差 (TOLERANCE)		绘图 (DRAWN)		审核 (APPROVE)		投影 (PROJECT)		料号 (PART NO)		发行编号 (Issue No)	
X. ± 3°	X.	韦翔丹				单位 (UNIT)	MM	比例 (SCALE)	7:1	版本号 (DRAW NO)	
.X ± 2°	.X ± 0.30	校对 (CHECKED)				日期 (DATE)	06-11-27	品名 (NAME)	1.27排针 双排 90度 H=1.00		
.XX ± 1°	.XX ± 0.20	核准 (APPROVE)				版本 (EDITION)	A0				
.XXX ± 0.5°	.XXX ± 0.10										

ZYSZ INDUSTRY CO., LTD