

REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
NEW		2006/09/04	




2.00*2.00mm (0.0787" * 0.0787") PIN HEADER, THREE ROW

STRAIGHT H=1.5mm

SPECIFICATIONS

Current Rating: 1.5AMP
 Withstanding Voltage: 500V AC/minute
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Black Polyester (UL94V-0)
 Standard: PA6T+30%G.F

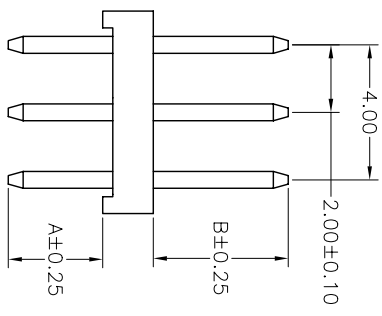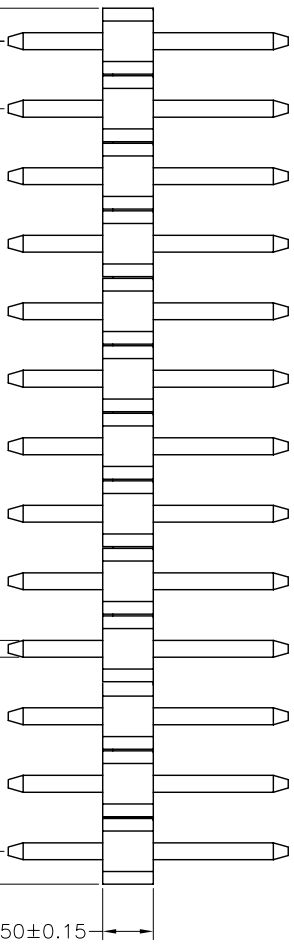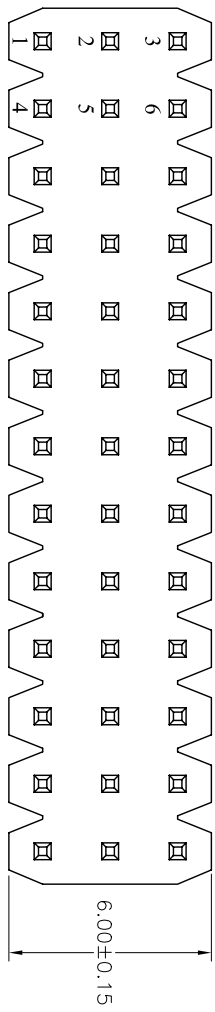


ITEM	A	B
Standard 1	2.80	4.00
Alternate		

Ordering Information

1215-1 3 XX XX S XXX 01

No. of Pins per Row: 01-40
 Contact Plating
 G0=Gold Flash
 G1=3u"Gold
 G2=5u"Gold
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S1=3u"Gold/Tin
 S2=5u"Gold/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tim

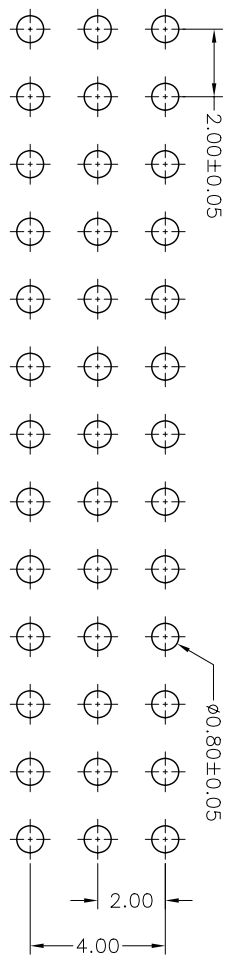

Recommended PCB Board Hole Layout

ZYSZ INDUSTRY CO., LTD

公差 (TOLERANCE)		绘图 (DRAWN)	韦翔丹	投影 (PROJECT)	单位 (UNIT)	比例 (SCALE)	版本 (EDITION)	日期 (DATE)	料号 (PART NO)	发行编号 (Issue No)
X. ± 5°	X.			MM	5:1	A0	06-09-04	1215-13XXXXXX01	1/1	
.X ± 2°	.X ± 0.38	校对 (CHECKED)								
.XX ± 1°	.XX ± 0.25	核准 (APPROVE)								
.XXX ± 0.5°	.XXX ± 0.12									

2.00排针 三排 180度 H=1.50