
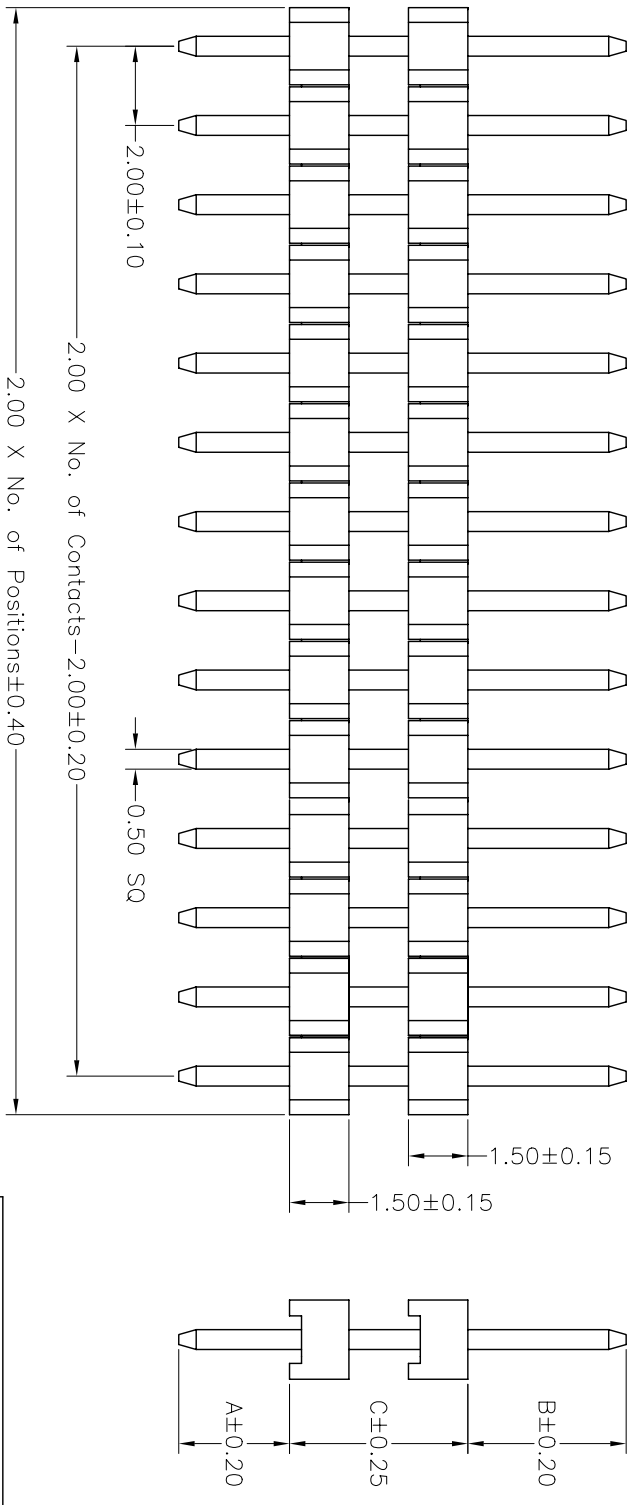


REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
A0		2006/12/01	

2. 00mm (0. 0787") SPACER SINGLE, SINGLE ROW, DOUBLE PLASTIC STRAIGHT H=1. 5mm

SPECIFICATIONS


Current Rating: 1. 5AMP
 Withstanding Voltage: 500V AC/minute
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40℃to+105℃
 Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Black Polyester (UL94V-0)
 Standard: PBT+30%G. F



Ordering Information

1215-2 1 XX XX S XXX 01
 No. of Pins per Row: 01-50
 Contact Plating: G0=Gold Flash, G1=30μ"Gold, G2=50μ"Gold, G3=100μ"Gold, G4=150μ"Gold, G5=300μ"Gold
 Contact Finish: S0=Gold Flash/Tin, S1=30μ"Gold/Tin, S2=50μ"Gold/Tin, S3=100μ"Gold/Tin, S4=150μ"Gold/Tin, S5=300μ"Gold/Tin, SN=Tin

Recommended PCB Board Hole Layout



Dimension antitheses list			
ITEM	A	B	C
Standard 1	2.80	4.00	
Alternate			

公差 (TOLERANCE)		绘图 (DRAWN)		审核 (APPROVE)		投影 (PROJECT)		料号 (PART NO)		发行编号 (Issue No)	
X.	± 3°	X.				MM	5:1	1215-21XXXXXXX01			
.X	± 2°	.X	± 0.30			MM	5:1				
.XX	± 1°	.XX	± 0.20			MM	5:1				
.XXX	± 0.5°	.XXX	± 0.10			MM	5:1				
				韦翔丹		A0		2.00排针 单排双塑 180度 H=1.50		1/1	

ZYSZ INDUSTRY CO., LTD