



REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
A0		2006/12/02	

2. 54mm (0. 100") PIN HEADER, SINGLE ROW, STRAIGHT H=2. 5mm

SPECIFICATIONS

Current Rating: 3AMP
 Withstanding Voltage: 1000V AC/minute
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C


Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Black Polyester (UL94V-0)
 Standard: PBT+30%G.F

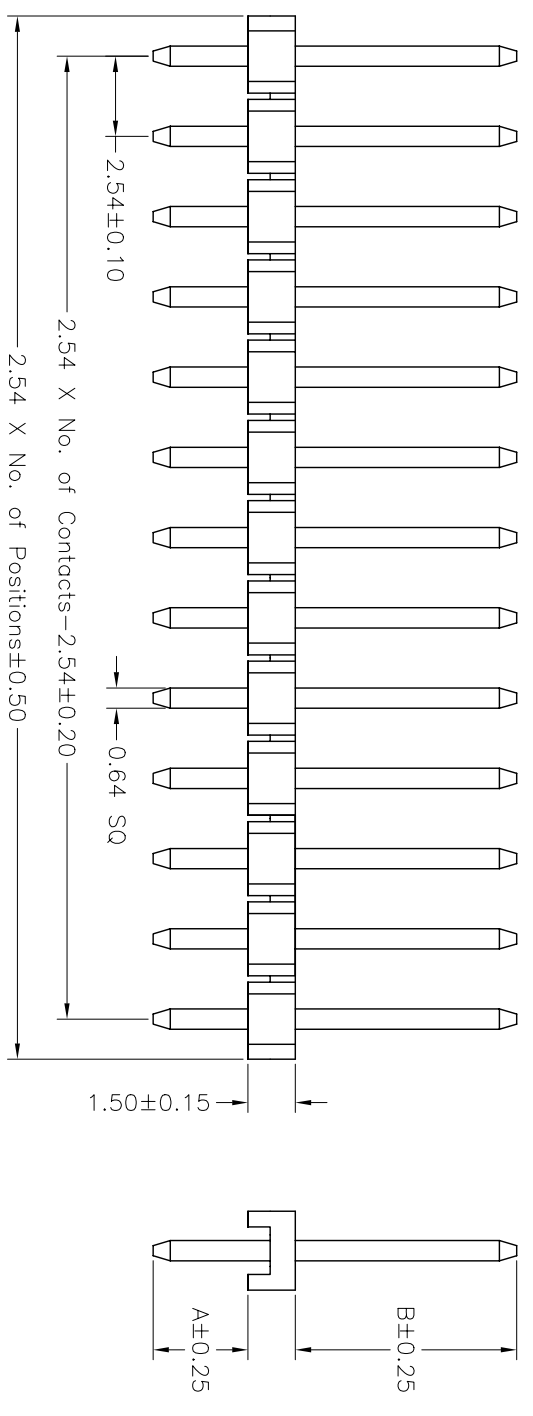

Ordering Information

1115-1 1 XX XX S XX 01

No. of Pins per Row: 01~40
 Contact Plating: G0=Gold Flash, G1=3μ"Gold, G2=5μ"Gold, G3=10μ"Gold, G4=15μ"Gold, G5=30μ"Gold, S0=Gold Flash/Tin, S1=3μ"Gold/Tin, S2=5μ"Gold/Tin, S3=10μ"Gold/Tin, S4=15μ"Gold/Tin, S5=30μ"Gold/Tin, SN=Tin
 Contact length: Standard=1.6mm, Standard=1.4, 5mm



Recommended PCB Board Hole Layout

Dimension antitheses list		
ITEM	A	B
Standard 1	3.00	6.00
Alternate	3.30	6.8
Alternate		

公差 (TOLERANCE)		绘图 (DRAWN)	审核 (APPROVE)	投影 (PROJECT)	料号 (PART NO)	发行编号 (Issue No)
X. ± 5°	X.	韦翔丹		MM	1115-11XXXXXXX01	
.X ± 2°	.X ± 0.38	校对 (CHECKED)		4:1		
.XX ± 1°	.XX ± 0.25	核准 (APPROVE)		A0		
.XXX ± 0.5°	.XXX ± 0.12			06-12-02	品名 (NAME)	2.54排针 单排 180度 H=1.50

ZYSZ INDUSTRY CO., LTD