




REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
NEW		2006/04/17	

2.54*2.54mm (0.100"*0.100") PIN HEADER, DUAL ROW STRAIGHT H=1.7mm

SPECIFICATIONS

Current Rating: 3AMP
 Withstanding Voltage: 1000V AC/minute
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C


Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Black Polyester (UL94V-0)
 Standard: PBT+30%G.F

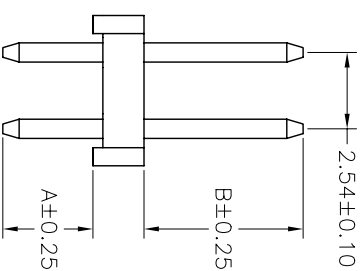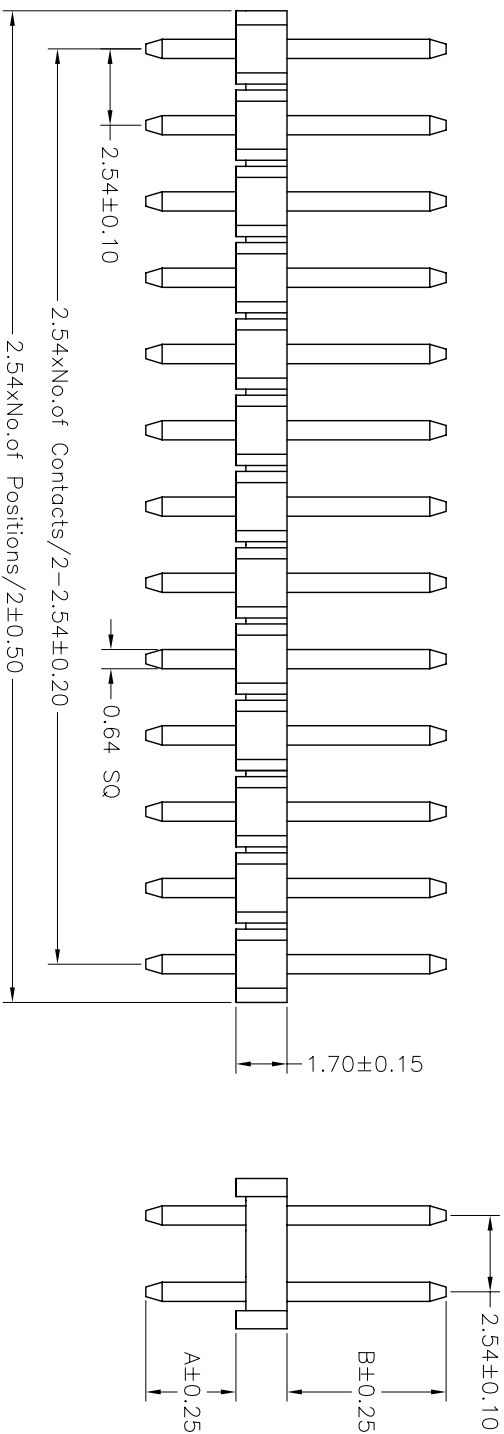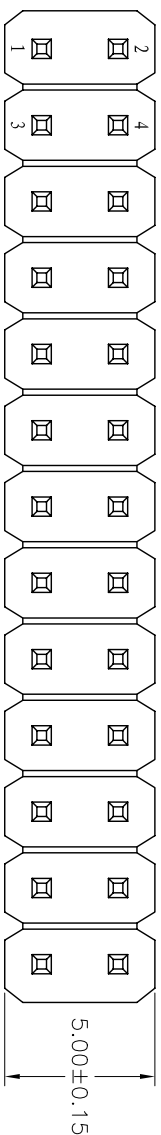

Ordering Information

1117-12 XX G0 S XXX 01

No. of Pins per Row: 02-80
 Contact Plating
 G0=Gold Flash
 G1=3u"Gold
 G2=5u"Gold
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S1=3u"Gold/Tin
 S2=5u"Gold/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tim

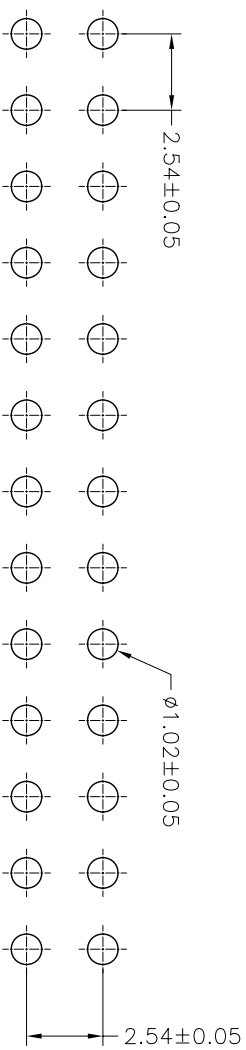

Recommended PCB Board Hole Layout

Dimension antitheses list		
ITEM	A	B
Standard 1	3.00	6.80
Alternate		

公差 (TOLERANCE)		绘图 (DRAWN)		审核 (APPROVE)		投影 (PROJECT)		料号 (PART NO)		发行编号 (Issue No)	
X. ± 5°	X.	韦翔丹	校对 (CHECKED)	日期 (DATE)	版本 (EDITION)	MM	比例 (SCALE)	4:1	1117-12XXXXXX01	1/1	
.X ± 2°	.X ± 0.38	核准 (APPROVE)	日期 (DATE)	06-04-17	A0						
.XX ± 1°	.XX ± 0.25										
.XXX ± 0.5°	.XXX ± 0.12										

ZYSZ INDUSTRY CO., LTD

2.54排针 双排 180度 H=1.70