
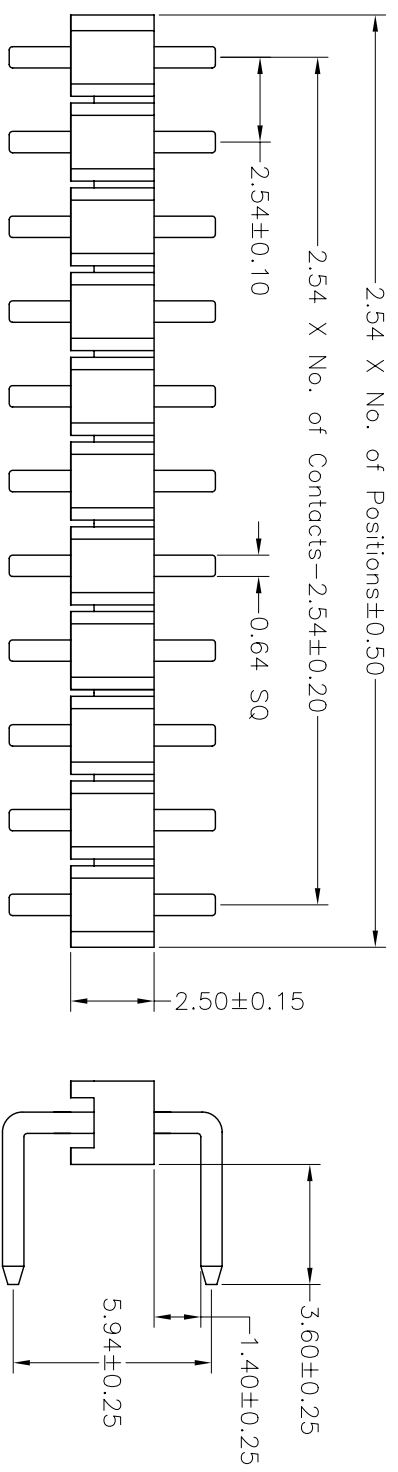


REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
A0		2006/12/02	

2. 54mm (0. 100") PIN HEADER, SINGLE ROW, RIGHT ANGLE C TYPE

SPECIFICATIONS

Current Rating: 3AMP
 Withstanding Voltage: 1000V AC/minute
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Black Polyester (UL94V-0)
 Standard: PBT+30% G. F

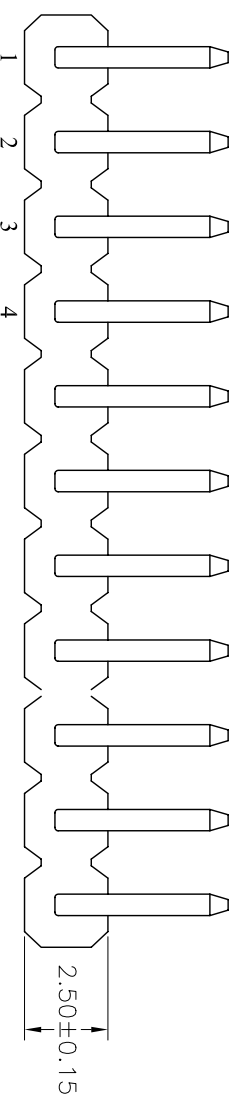

Ordering Information

1125-1 1 XX XX R 150 0X
 No. of Pins per Row: 01-40
 Contact Plating: G0=Gold Flash, G1=3μ"Gold, G2=5μ"Gold, G3=10μ"Gold, G4=15μ"Gold, G5=30μ"Gold, S0=Gold Flash/Tin, S1=3μ"Gold/Tin, S2=5μ"Gold/Tin, S3=10μ"Gold/Tin, S4=15μ"Gold/Tin, S5=30μ"Gold/Tin, SN=Tin
 Contact length Standard=1.50mm

公差 (TOLERANCE)		绘图 (DRAWN)		投影 (PROJECT)		料号 (PART NO)		发行编号 (Issue No)	
X. ± 3°	X.	韦翔丹		单位 (UNIT)	MM	1125-11XXXXXR15003			
.X ± 2°	.X ± 0.30	校对 (CHECKED)		比例 (SCALE)	4:1			页次 (PAGE)	
.XX ± 1°	.XX ± 0.20	批准 (APPROVE)		版本 (EDITION)	A0	品名 (NAME)		2.54排针 单排 90度 H=2.50 C型	
.XXX ± 0.5°	.XXX ± 0.10			日期 (DATE)	06-12-02				

ZYSZ INDUSTRY CO., LTD