
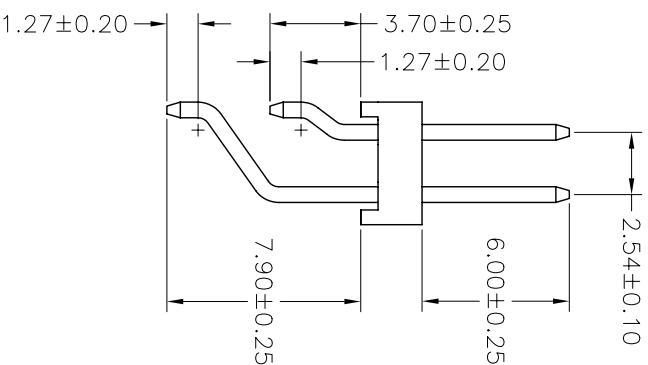
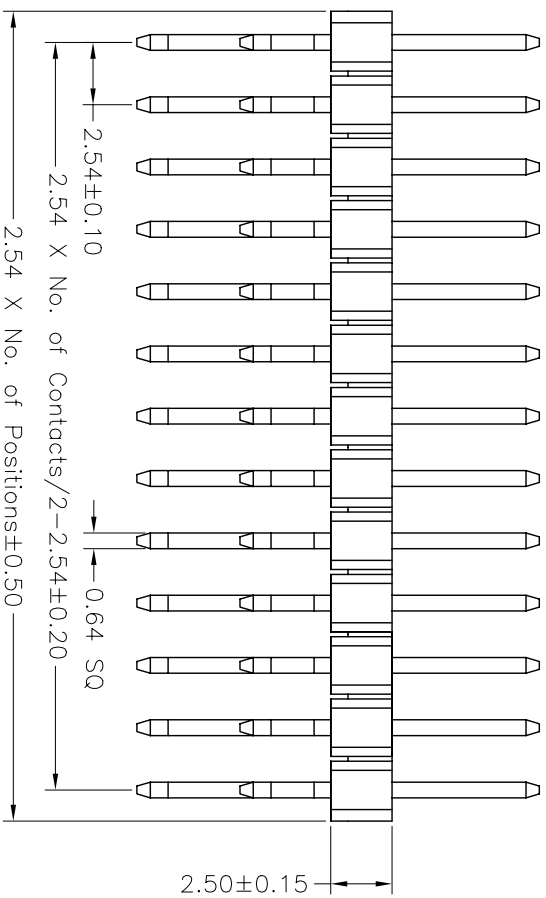


2.54*2.54mm (0.100"*0.100") PIN HEADER, DUAL ROW RIGHT ANGLE SMT, H=2.5mm

SPECIFICATIONS

Current Rating: 3AMP
 Withstanding Voltage: 1000V AC/minute
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Black Polyester (UL94V-0)
 Pin Length: 0.64*12.3
 0.64*17.8

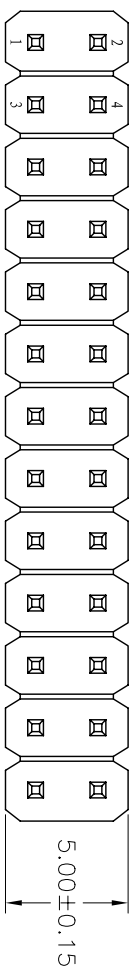


Ordering Information

1125-12 **XX** **XX** M 123 01

No. of Pins per Row: 01-40
 Contact Plating:
 G0=Gold Flash
 G1=3u"Gold
 G2=5u"Gold
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S1=3u"Gold/Tin
 S2=5u"Gold/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin

Contact length Standard=12.3mm

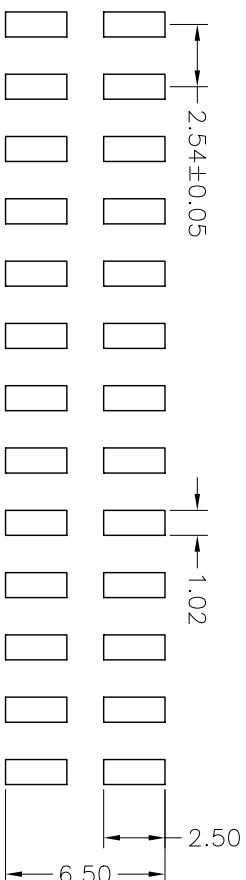

Recommended PCB Board Hole Layout

公差 (TOLERANCE)		绘图 (DRAWN)		投影 (PROJECT)		料号 (PART NO)	
Y. ± 5°	X.	韦翔丹		MM	MM	1125-12XXXXXM12301	
.X ± 2°	.X ± 0.38	校对 (CHECKED)		4:1	4:1	发行编号 (Issue No)	
.XX ± 1°	.XX ± 0.25	核准 (APPROVE)		日期 (DATE)	06-12-04	页次 (PAGE)	
.XXX ± 0.5°	.XXX ± 0.12			品名 (NAME)	2.54排针 双排 SMT H=2.50		

ZYSZ INDUSTRY CO., LTD

REVISION DATA		
ITEM	DESCRIPTION	DATE
A0		2006/12/04