


REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
A0		2006/11/14	

1. 27mm (0.050") FEMALE HEADER, SINGLE ROW, SMT H=2.1mm


SPECIFICATIONS

Current Rating: 1AMP
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstand Voltage: 500V AC/minute
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T+30%GF

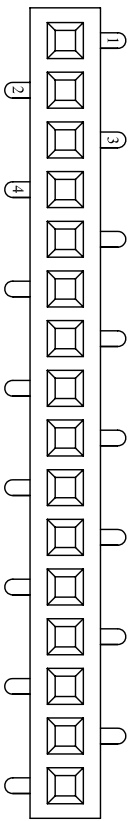

Type 2

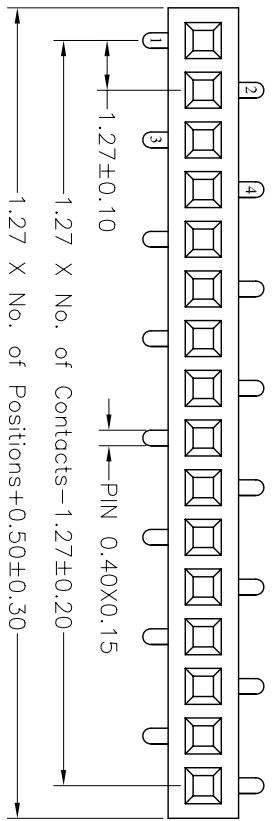


Type 1

Ordering Information

2321-2 XX M XX X UN01

- No. of Pins per Row: 02-25
- Contact Plating: G0=Gold Flash, G1=3μ"Gold, G2=5μ"Gold, G3=10μ"Gold, G4=15μ"Gold, G5=30μ"Gold, SP=Gold Flash/Tin, S1=5μ"Gold/Tin, S2=5μ"Gold/Tin, S3=10μ"Gold/Tin, S4=15μ"Gold/Tin, S5=30μ"Gold/Tin, SN=Tin
- Insulator Material: C=PA6T, D=LCP, E=PA46

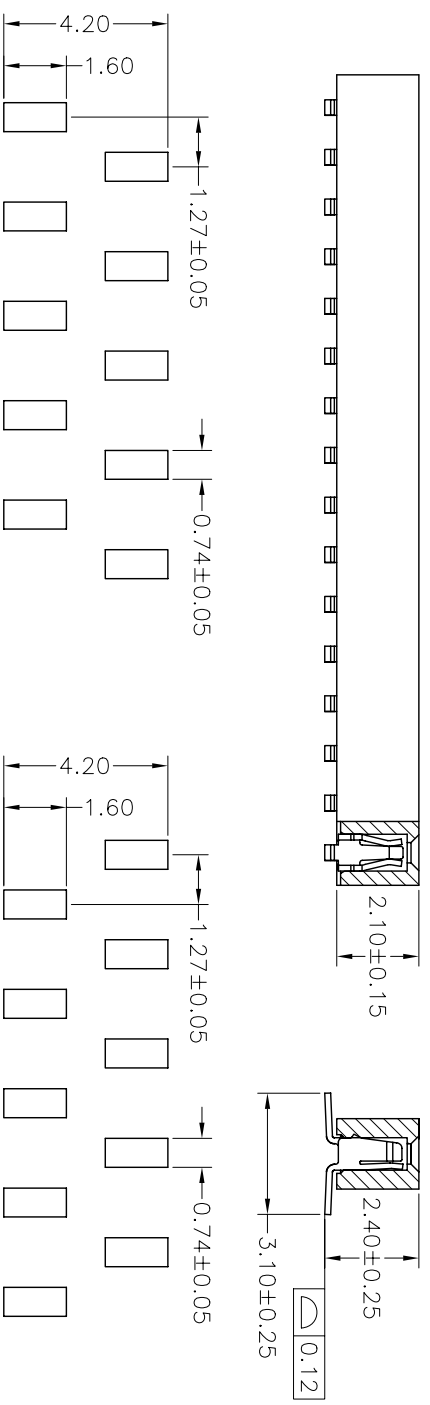

Type 1 Recommended PCB Board Layout

Type 2

公差 (TOLERANCE)		绘图 (DRAWN)		投影 (PROJECT)		料号 (PART NO)		发行编号 (Issue No)	
X. ± 5°	X.	韦翔丹		MM	MM	2321-1XXMXXUN01	1/1		
.X ± 2°	.X ± 0.38	校对 (CHECKED)		5:1	A0				
.XX ± 1°	.XX ± 0.25	核准 (APPROVE)		日期 (DATE)	06-11-14				
.XXX ± 0.5°	.XXX ± 0.12			品名 (NAME)					
					1.27单排母 SMT H=2.10				

ZYSZ INDUSTRY CO., LTD