




REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
A0		2006/11/14	

1. 27mm (0.050") FEMALE HEADER, SINGLE ROW, STRAIGHT H=2.1mm

SPECIFICATIONS

Current Rating: 1AMP
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstand Voltage: 500V AC/minute
 Operation Temperature: -40℃to+105℃

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T+30%GF

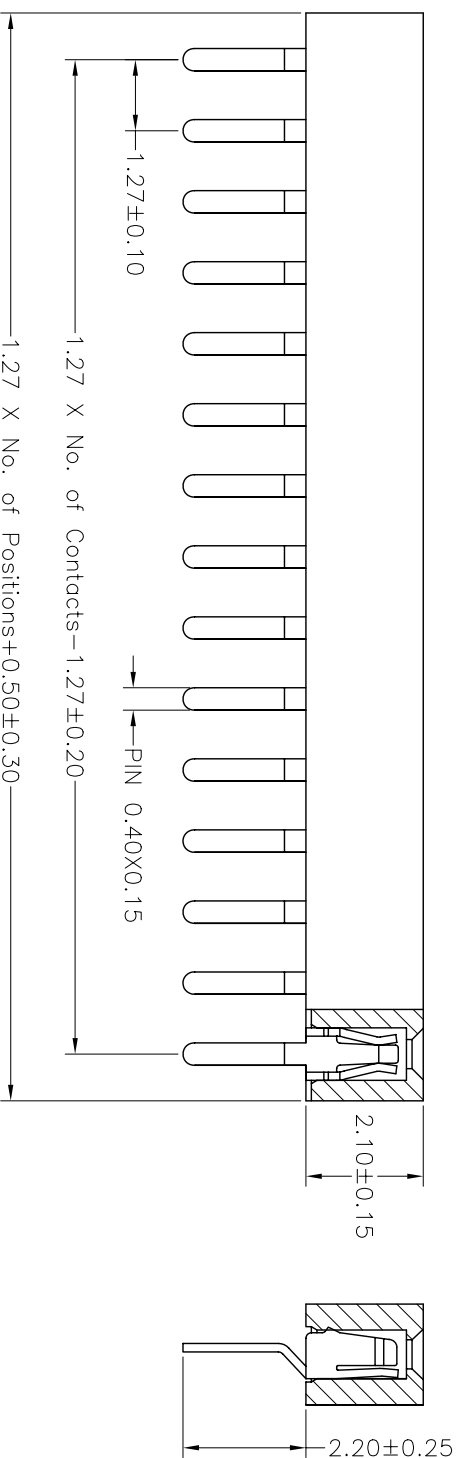

Recommended PCB Board Hole Layout

Ordering Information

2321-1 XXX S XXX X UN01

No. of Pins per Row: 02-25
 Contact Plating: G0=Gold Flash, G1=3u"Gold, G2=5u"Gold, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
 Insulator Material: C=PA6T, D=LCP, E=PA46
 Contact Flash: S0=Gold Flash/Tin, S1=3u"Gold/Tin, S2=5u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin
 SN=Tin

ZYSZ INDUSTRY CO., LTD

公差 (TOLERANCE)		绘图 (DRAWN)	审核 (APPROVE)	投影 (PROJECT)	单位 (UNIT)	比例 (SCALE)	版本 (EDITION)	日期 (DATE)	料号 (PART NO)	品名 (NAME)
X. ± 5°	X.			MM	7:1	A0	06-11-14	2321-1XXXSXXXUN01	1.27单排母 180度 H=2.10	
.X ± 2°	.X ± 0.38	校对 (CHECKED)								
.XX ± 1°	.XX ± 0.25	核准 (APPROVE)								
.XXX ± 0.5°	.XXX ± 0.12									

发行编号 (Issue No)

页次 (PAGE)

1/1