


REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
A0		2006/11/14	

# 1. 27\*1. 27mm (0. 050"\*0. 050") FEMALE HEADER, DUAL ROW, SMT H=2. 1mm

## SPECIFICATIONS



- Current Rating: 1AMP
- Contact Resistance: 20mΩ Max
- Insulation Resistance: 1000MΩ Min
- Withstand Voltage: 500V AC/minute
- Operation Temperature: -40℃to+105℃
- Contact Material: Phosphor Bronze
- Contact plating: Au or Sn Over Ni
- Insulator Material: Polyester (UL94V-0)
- Standard: PA6T+30%GF

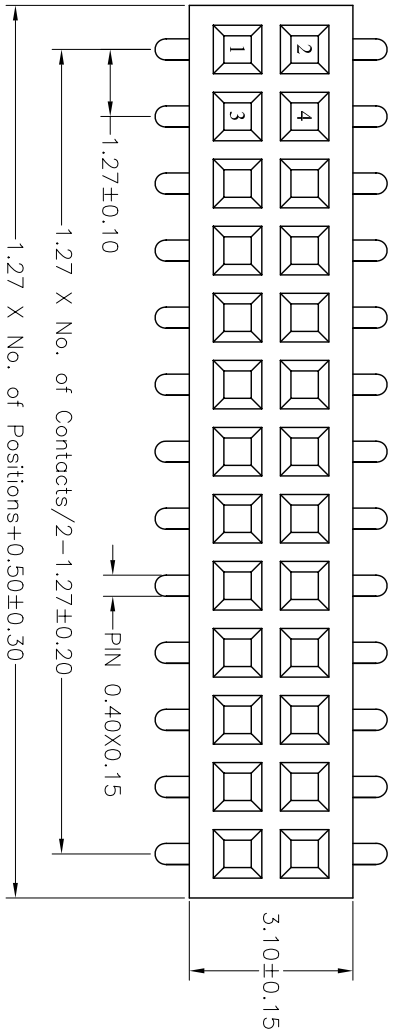

## Ordering Information

2321-2 XX M XX X UN01

- No. of Pins per Row: 03-50
- Contact Plating:  
 G0=Gold Flash  
 G1=3u"Gold  
 G2=5u"Gold  
 G3=10u"Gold  
 G4=15u"Gold  
 G5=30u"Gold
- Insulator Material:  
 C=PA6T  
 D=LCP  
 E=PA46
- Other options:  
 S0=Gold Flash/Tin  
 S1=3u"Gold/Tin  
 S2=5u"Gold/Tin  
 S3=10u"Gold/Tin  
 S4=15u"Gold/Tin  
 S5=30u"Gold/Tin  
 SN=Tin

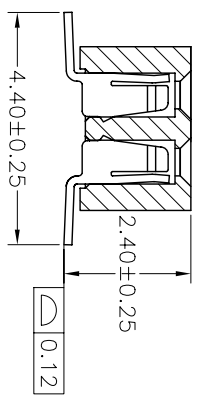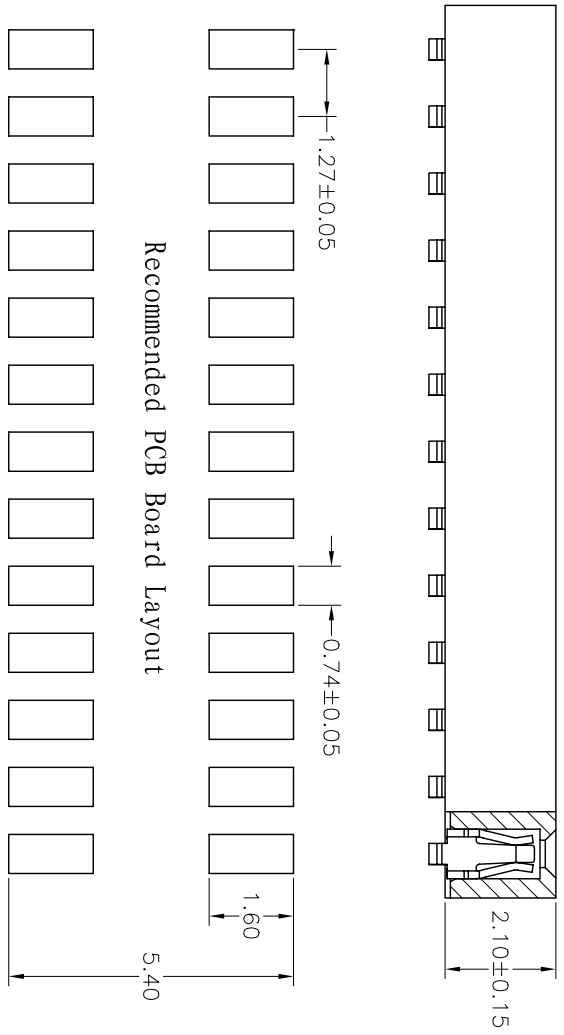

# ZYSZ INDUSTRY CO., LTD

公差 (TOLERANCE)		绘图 (DRAWN)		审核 (APPROVE)		投影 (PROJECT)		料号 (PART NO)		发行编号 (Issue No)	
X. ± 5°	X.	韦翔丹				MM	7:1	2321-2XXMXXUN01			
.X ± 2°	.X ± 0.38	校对 (CHECKED)				MM	A0		页次 (PAGE)		
.XX ± 1°	.XX ± 0.25	核准 (APPROVE)				MM	A0		1/1		
.XXX ± 0.5°	.XXX ± 0.12					MM	A0		1. 27双排母 SMT H=2. 10		