
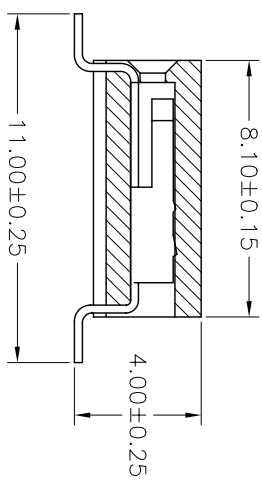


REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
A0		2006/11/22	

2. 54mm (0. 100") FEMALE HEADER, SINGLE ROW, SMT H=3. 4mm

SPECIFICATIONS


Current Rating: 3AMP
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstand Voltage: 1000V AC/minute
 Operation Temperature: -40°C to +105°C
 Insertion Depth:
 (4. 34 ~ 6. 35mm) . 171" ~ . 250"
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T+30%GF

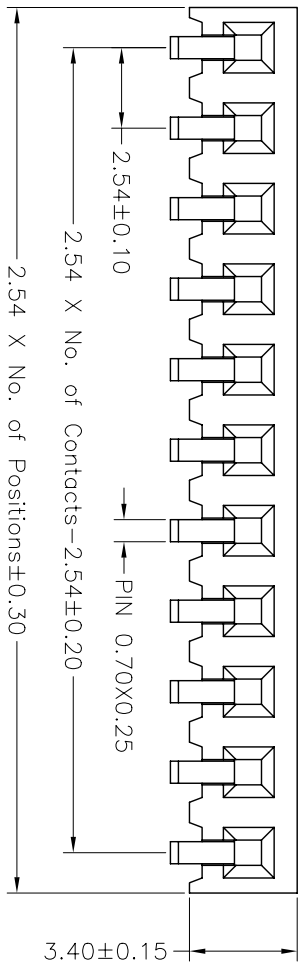

Ordering Information

2134-1 XX M XX X UN01

No. of Pins per Row: 02-40
 Contact Plating: G0=Gold Flash, G1=3u"Gold, G2=5u"Gold, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S1=3u"Gold/Tin, S2=5u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin
 Insulator Material: C=PA6T, D=UCP, E=PA46

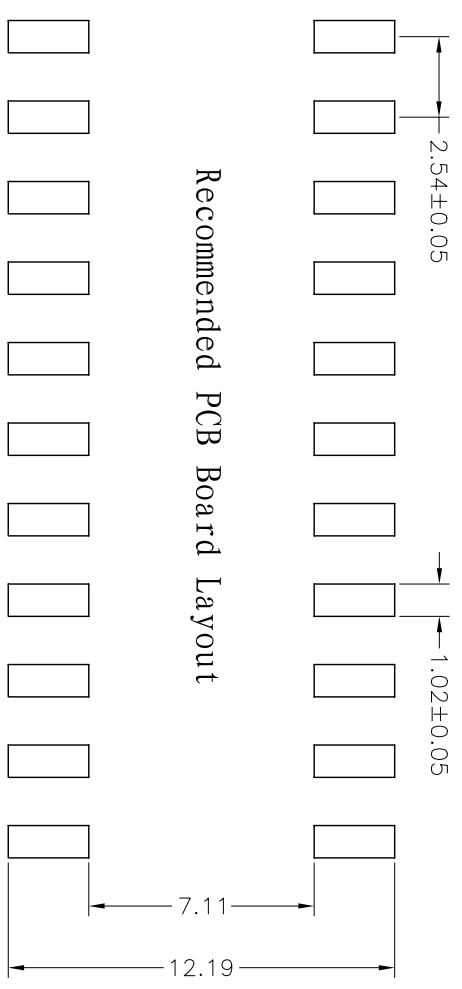

Recommended PCB Board Layout

公差 (TOLERANCE)		绘图 (DRAWN)		审核 (APPROVE)		投影 (PROJECT)		料号 (PART NO)		发行编号 (Issue No)	
X. ± 5°	X.	绘图 (DRAWN)	审核 (APPROVE)	单位 (UNIT)	比例 (SCALE)	版本 (EDITION)	日期 (DATE)	品名 (NAME)	2134-1XXMXXXXUN01	页次 (PAGE)	1/1
.X ± 2°	.X ± 0.38	校对 (CHECKED)		MM	4:1	A0	06-11-22				
.XX ± 1°	.XX ± 0.25	核准 (APPROVE)									
.XXX ± 0.5°	.XXX ± 0.12										

ZYSZ INDUSTRY CO., LTD

2. 54单排母 SMT H=3. 40