



REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
A0		2006/11/22	

2. 54mm (0. 100") FEMALE HEADER, SINGLE ROW, RIGHT ANGLE H=3. 4mm

SPECIFICATIONS

Current Rating: 3AMP
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstand Voltage: 1000V AC/minute
 Operation Temperature: -40℃to+105℃
 Insertion Depth:
 (4. 34 ~ 6. 35mm) . 171" ~ . 250"


Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT+30%GF

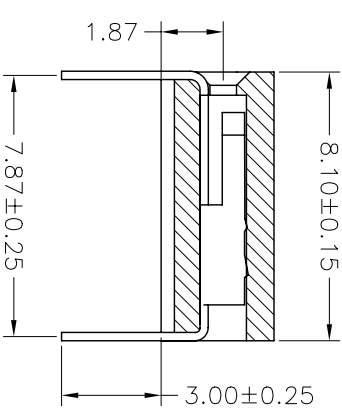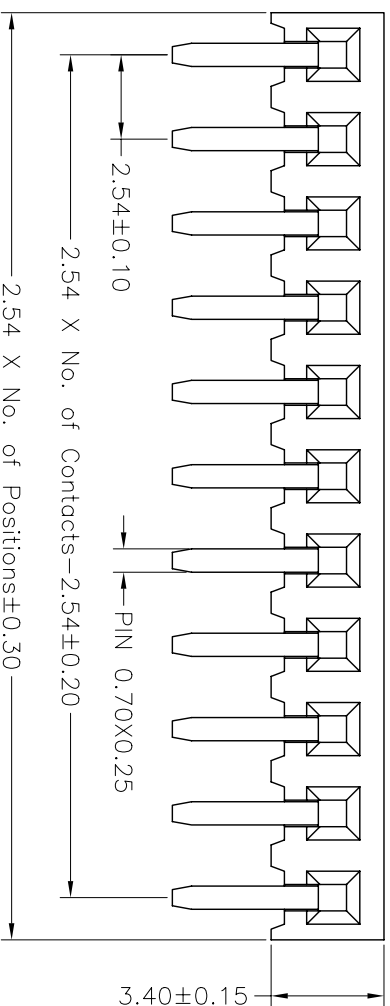

Ordering Information

2134-1 XXX S XXX X UN01

No. of Pins per Row: 02-40
 Contact Plating: G0=Gold Flash, G1=3u"Gold, G2=5u"Gold, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S1=3u"Gold/Tin, S2=5u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin
 Insulator Material: A=PBT, B=P A66, C=PA6T, E=PA46

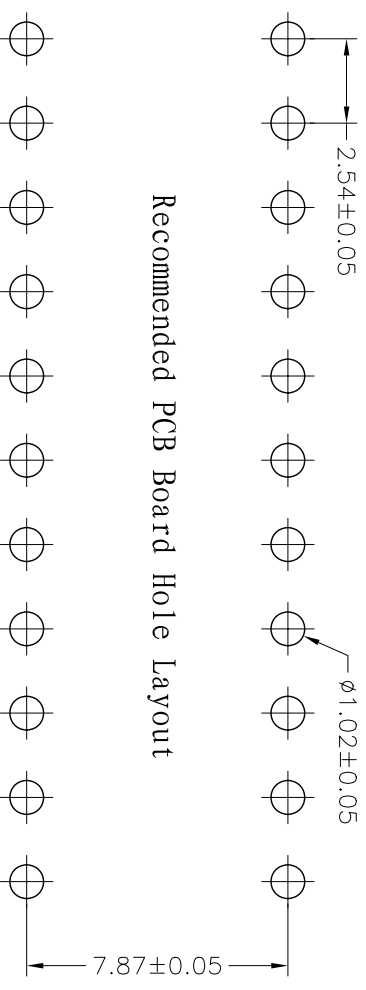

Recommended PCB Board Hole Layout

公差 (TOLERANCE)		绘图 (DRAWN)		投影 (PROJECT)		料号 (PART NO)		发行编号 (Issue No)	
X. ± 5°	X.	韦翔丹		单位 (UNIT)	MM	2134-1XXXXXXUN01	1/1		
.X ± 2°	.X ± 0.38	校对 (CHECKED)		比例 (SCALE)	4:1				
.XX ± 1°	.XX ± 0.25	核准 (APPROVE)		版本 (EDITION)	A0				
.XXX ± 0.5°	.XXX ± 0.12			日期 (DATE)	06-11-22				
						品名 (NAME)	2. 54单排母 侧插90度 H=3. 40		

ZYSZ INDUSTRY CO., LTD