
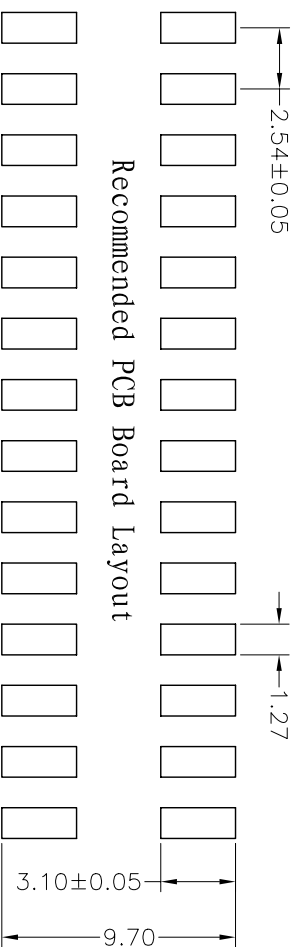
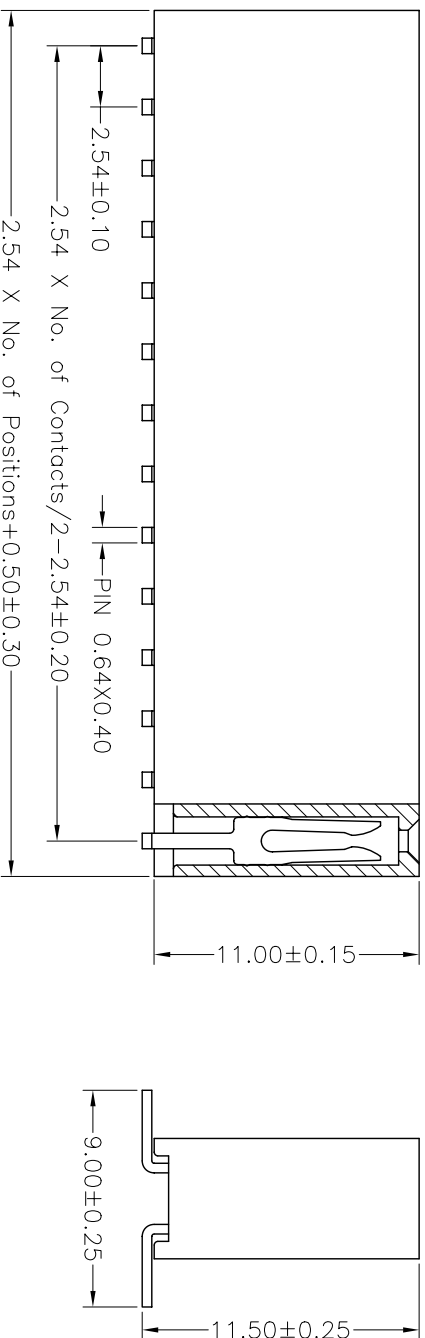


2.54*2.54mm (0.100"*0.100") FEMALE HEADER, DUAL ROW, SMT

H=11.0mm

SPECIFICATIONS

- Current Rating: 3AMP
- Contact Resistance: 20mΩ Max
- Insulation Resistance: 1000MΩ Min
- Withstand Voltage: 1000V AC/minute
- Operation Temperature: -40°C to +105°C
- Insertion Depth:
- Top Entry=(3.68 ~ 6.30mm). 145" ~ .248"
- Contact Material: Brass
- Contact plating: Au or Sn Over Ni
- Insulator Material: Polyester (UL94V-0)
- Standard: PA6T+30%GF

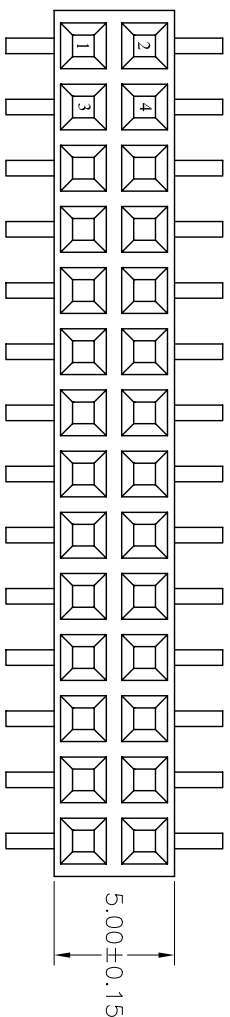

Ordering Information

21111-2 XX S XX X YN01

- No. of Pins per Row: 02-40
- Contact Plating:
 G0=Gold Flash
 G1=3u"Gold
 G2=5u"Gold
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
- Insulator Material:
 C=P/A6T
 D=LCP
 E=P/A46
- SN=Gold Flash/Tin
 S1=3u"Gold/Tin
 S2=5u"Gold/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin

公差 (TOLERANCE)

X.	± 5°	X.		绘图 (DRAWN)	韦翔丹	投影 (PROJECT)	MM	料号 (PART NO)	21111-2XXMXXXYN01	发行编号 (Issue No)	
.X	± 2°	.X	± 0.38	校对 (CHECKED)		单位 (UNIT)	MM	图号 (DRAW NO)		页次 (PAGE)	1/1
.XX	± 1°	.XX	± 0.25	核准 (APPROVE)		比例 (SCALE)	4:1	品名 (NAME)	2.54双排母 SMT H=11.0		
.XXX	± 0.5°	.XXX	± 0.12			版本 (EDITION)	A0				
						日期 (DATE)	06-11-22				

ZYSZ INDUSTRY CO., LTD

REVISION DATA

ITEM	DESCRIPTION	DATE	REMARK
A0		2006/11/22	