
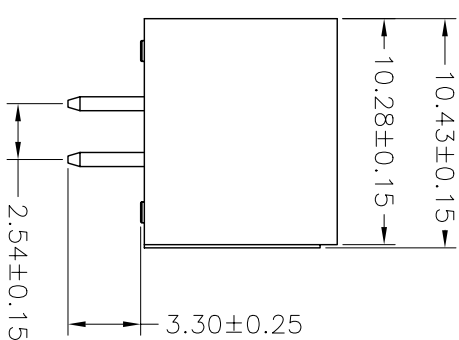
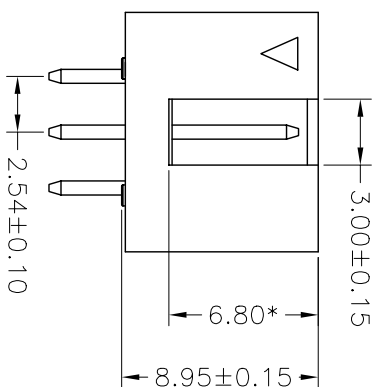


REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
NEW		2006/11/25	

2. 54mm (0. 100") BOX HEADER, STRAIGHT, WIDEN TYPE

SPECIFICATIONS

Current Rating: 3AMP
 Withstand Voltage: 1000V AC/minute
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40℃to+105℃
 Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT+30%G. F



Ordering Information


3110 - XX S XX X KXX 0X

No. of Pins
06=6P

Contact Plating:
 G0=Gold Flash
 G1=3u"Gold
 G2=5u"Gold
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold

SN=Gold Flash/Tin
 S1=3u"Gold/Tin
 S2=5u"Gold/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin

Recommended PCB Board Hole Layout

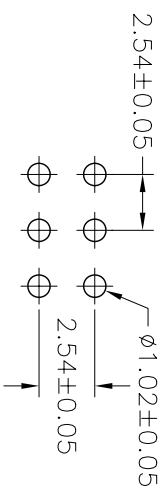

公差 (TOLERANCE)		绘图 (DRAWN)		投影 (PROJECT)		客户料号		客户编号	
X. ± 5°	X.	审核 (APPROVE)	日期 (DATE)	单位 (UNIT)	比例 (SCALE)	料号 (PART NO)	发行编号 (Issue No)	客户料号	客户编号
.X ± 2°	.X ± 0.38	校对 (CHECKED)	版本 (EDITION)	MM	1 : 1	3110-06SXXBK0002	1/1	3110-06SXXBK0002	K2109
.XX ± 1°	.XX ± 0.25	核准 (APPROVE)	日期 (DATE)	A0					
.XXX ± 0.5°	.XXX ± 0.12								

ZYSZ INDUSTRY CO., LTD

2.54 筒牛 6P 180度 加大型