

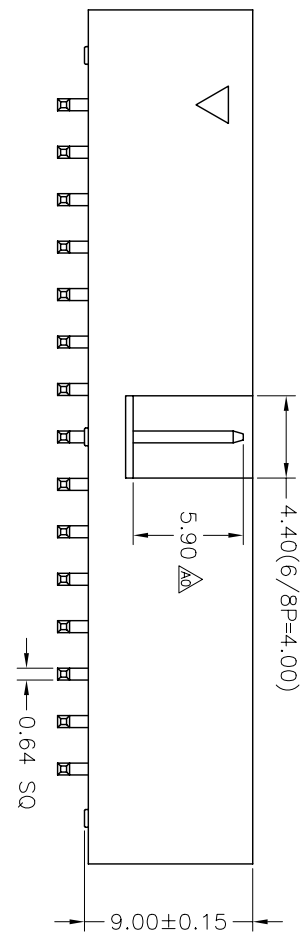


# 2.54mm (0.100") BOX HEADER, SMT

## SPECIFICATIONS

Current Rating: 3AMP  
 Withstand Voltage: 1000V AC/minute  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: Pa6T+30%G, F

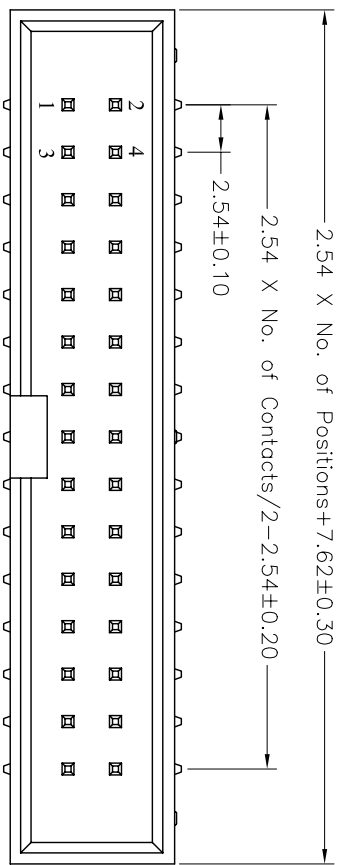


## Ordering Information

3110 - XX M XX X KXX 01

No. of Pins	Contact Plating:
06=6P	G0=Gold Flash
08=8P	G1=3u"Gold
10=10P	G2=5u"Gold
12=12P	G3=10u"Gold
14=14P	G4=15u"Gold
16=16P	G5=30u"Gold
18=18P	S0=Gold Flash/Tin
20=20P	S1=3u"Gold/Tin
26=26P	S2=5u"Gold/Tin
30=30P	S3=10u"Gold/Tin
34=34P	S4=15u"Gold/Tin
40=40P	S5=30u"Gold/Tin
50=50P	SN=Tin
60=60P	
64=64P	

### Recommended PCB Board Layout

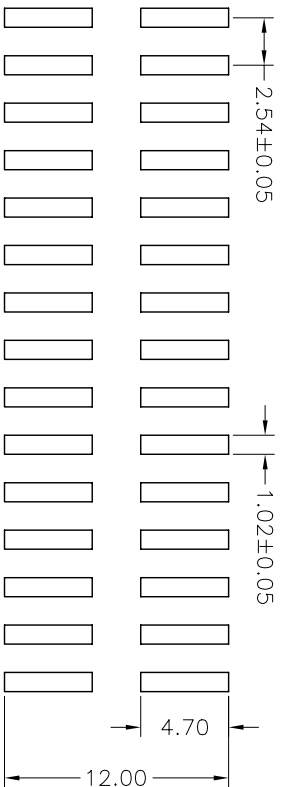

公差 (TOLERANCE)		绘图 (DRAWN)		审核 (APPROVE)		投影 (PROJECT)		料号 (PART NO)		发行编号 (Issue No)	
X. ± 5°	X.	绘图 (DRAWN)	龚 龙	核准 (APPROVE)		单位 (UNIT)	MM	3110-XXMXXXXXX01	页次 (PAGE)	1/1	
.X ± 2°	.X ± 0.38	校对 (CHECKED)				比例 (SCALE)	1 : 1				
.XX ± 1°	.XX ± 0.25	核准 (APPROVE)				版本 (EDITION)	A0				
.XXX ± 0.5°	.XXX ± 0.12					日期 (DATE)	05-12-19	品名 (NAME)	2.54 筒牛 SMT		

# ZYSZ INDUSTRY CO., LTD

### REVISION DATA

ITEM	DESCRIPTION	DATE	REMARK
A0	11.60±0.30 → 9.50±0.25 变更脚号及增加尺寸, 50尺寸	05-12-19	