
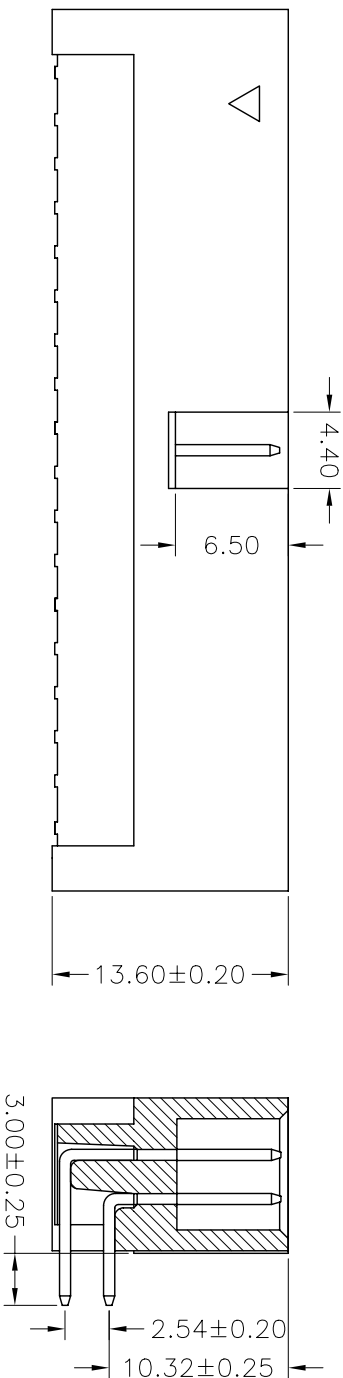


# 2.54mm (0.100") BOX HEADER, RIGHT ANGLE H=13.60

## SPECIFICATIONS

Current Rating: 3AMP  
 Withstand Voltage: 1000V AC/minute  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C  
 Contact Material: Brass  
 Contact plating: Au Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PBT+30%G.F

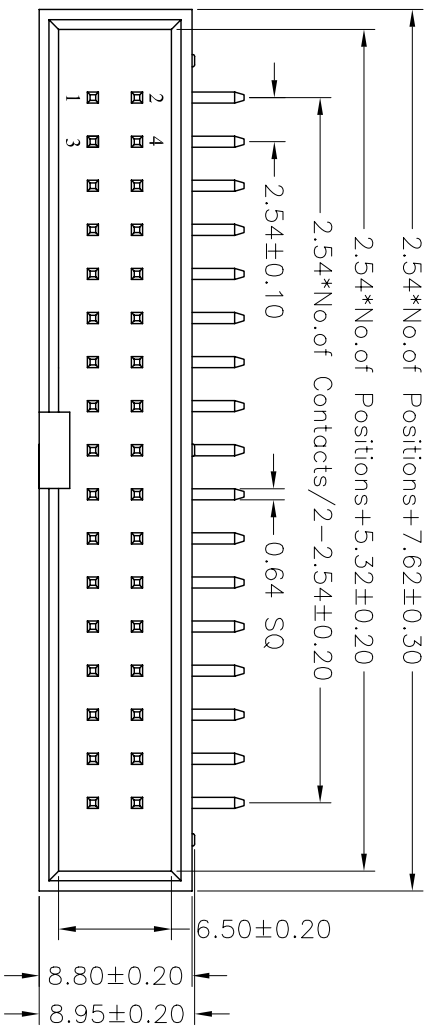

## Ordering Information

3112 - XX R XX K00 0X

No. of Pins	Contact Plating:
06=6P	G0=Gold Flash
08=8P	G1=3u"Gold
10=10P	G2=5u"Gold
12=12P	G3=10u"Gold
14=14P	G4=15u"Gold
16=16P	G5=30u"Gold
18=18P	S0=Gold Flash/Tin
20=20P	S1=3u"Gold/Tin
26=26P	S2=5u"Gold/Tin
30=30P	S3=10u"Gold/Tin
34=34P	S4=15u"Gold/Tin
40=40P	S5=30u"Gold/Tin
50=50P	SN=Tin
60=60P	
64=64P	

Recommended PCB Board Hole Layout

公差 (TOLERANCE)		绘图 (DRAWN)		审核 (APPROVE)		投影 (PROJECT)		料号 (PART NO)		发行编号 (Issue No)	
X. ± 5°	X.	校对 (CHECKED)	日期 (DATE)	比例 (SCALE)	MM	图号 (DRAW NO)	3112-XXXXXXK000X	页次 (PAGE)	1/1		
.X ± 2°	.X ± 0.38	核准 (APPROVE)	日期 (DATE)	比例 (SCALE)	2.5:1	品名 (NAME)	2.54 筒牛 90度 塑高13.60				
.XX ± 1°	.XX ± 0.25				A0						
.XXX ± 0.5°	.XXX ± 0.12				06-07-11						

# ZYSZ INDUSTRY CO., LTD

REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
△A0	NEW REVISION	2006/07/11	