

2.54mm (0.100") IDC BOX Header With ear type


SPECIFICATIONS

Current Rating: 1AMP
 Contact Resistance: 15mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstand Voltage: 500V AC/minute
 Operation Temperature: -40°C to +105°C
 Contact Material: Copper Alloy.
 Contact plating: Au Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT+30%G.F

Ordering Information

3810 - XX XX W X N 01

No. of Pins	Contact Plating:
10 12 14	G0=Gold Flash
16 20 24	G1=3u"Gold
26 30 34	G2=5u"Gold
40 50 60 64	G3=10u"Gold
	G4=15u"Gold
	G5=30u"Gold
	S0=Gold Flash/Tin
	S1=3u"Gold/Tin
	S2=5u"Gold/Tin
	S3=10u"Gold/Tin
	S4=15u"Gold/Tin
	S5=30u"Gold/Tin
	SN=Tin

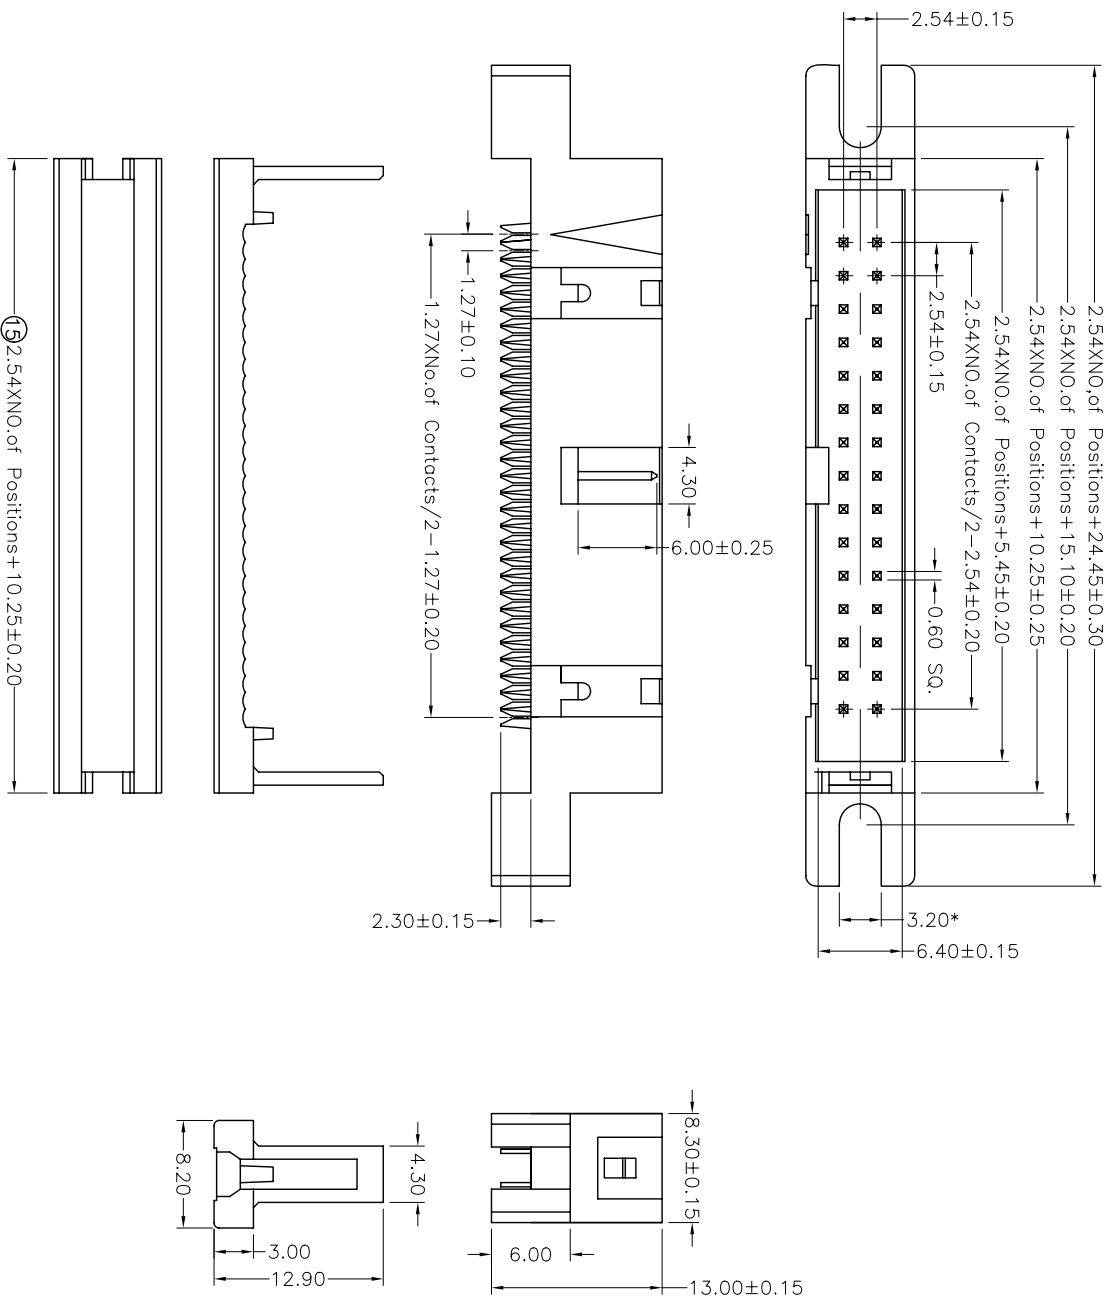

公差 (TOLERANCE)

X.	± 5°	X.
.X	± 2°	.X ± 0.38
.XX	± 1°	.XX ± 0.25
.XXX	± 0.5°	.XXX ± 0.12

绘图 (DRAWN)	龚 龙	投影 (PROJECT)	MM	料号 (PART NO)	3810-XXXXXXN01
校对 (CHECKED)		比例 (SCALE)	2:1	图号 (DRAW NO)	
核准 (APPROVE)		版本 (EDITION)	A0	品名 (NAME)	2.54mm 刺破式筒车带定位耳
		日期 (DATE)	05-12-10		H=13.00

发行编号 (Issue No)	1/1
-----------------	-----

ZYSZ INDUSTRY CO., LTD

REVISION DATA		
ITEM	DESCRIPTION	DATE
A0		05-12-10

DATE	REMARK