



REVISION DATA

ITEM	DESCRIPTION	DATE	REMARK
AA		05.08.25	

1.27mm I. D. C SOCKET WITH POLARIZATION BUMP

SPECIFICATIONS

Current Rating: 0.5AMP
 Voltage Rating: 250V AC/DC
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 250V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40℃ to +105℃
 Contact Material: Brass
 Contact plating: Au Over Ni
 Insulator Material: PBT+30%GF (UL94V-0)
 Terminated with 0.635mm pitch flat ribbon cable

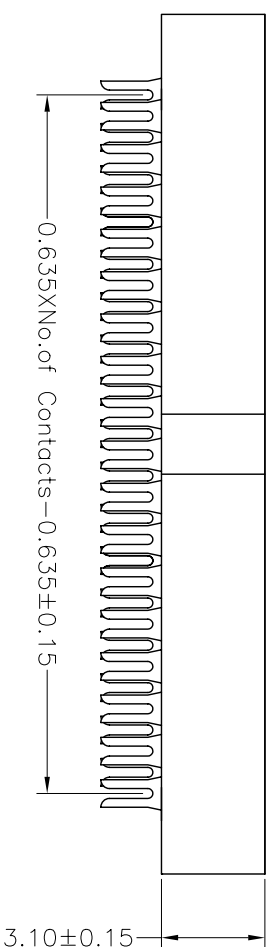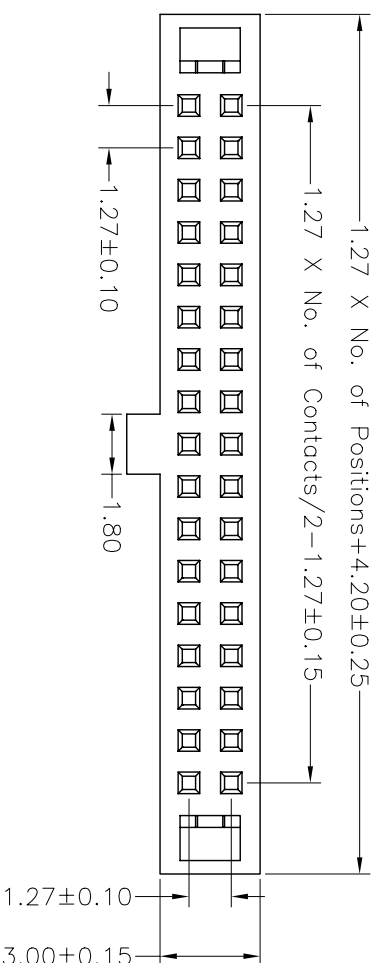

No. of Pins
 6P~ 80P

Contact Plating:
 G0=Gold Flash
 G1=3u"Gold
 G2=5u"Gold
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S1=3u"Gold/Tin
 S2=5u"Gold/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin

Ordering Information

5232-XX YB XX W01

公差 (TOLERANCE)		绘图 (DRAWN)		杨启晓		投影 (PROJECT)		料号 (PART NO)		发行编号 (Issue No)	
X. ± 5°	X.	校对 (CHECKED)	核准 (APPROVE)	单位 (UNIT)	MM	比例 (SCALE)	4:1	图号 (DRAW NO)	5232-XXYBXXW01	页次 (PAGE)	1/1
.X ± 2°	.X ± 0.38			版本 (EDITION)	A0			1.27mm IDC 两件式带凸点			
.XX ± 1°	.XX ± 0.25			日期 (DATE)	05-08-25						
.XXX ± 0.5°	.XXX ± 0.12										

ZYSZ INDUSTRY CO., LTD