




1. 27*2. 54mm (0. 050"*0. 100") I. D. C SOCKET WITH POLARIZATION BUMP

SPECIFICATIONS

Current Rating: 0. 5AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 30mΩ Max
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: PBT+30%GF (UL94V-0)


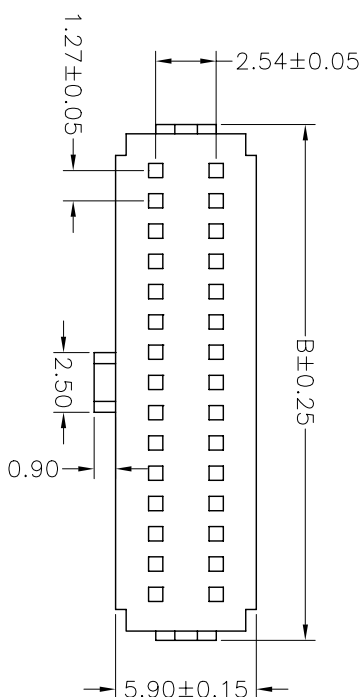


DIMENSION		
POSITION	A	B
10	05.08	11.10
20	11.43	17.45
30	17.78	23.80
40	24.13	30.15
50	30.48	36.50
60	36.83	42.85
70	43.18	49.20
80	49.53	55.55
90	55.88	61.90
100	62.23	68.25

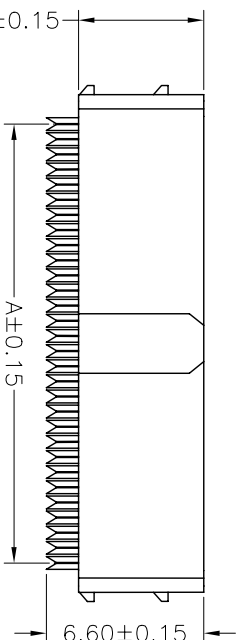

- 5243- XX YP XX WXX
- | | |
|------------|-------------------|
| No.of Pins | Contact Plating: |
| 10P 60P | G0=Gold Flash |
| 12P 62P | G1=3u"Gold |
| 14P 64P | G2=5u"Gold |
| 16P 68P | G3=10u"Gold |
| 18P | G4=15u"Gold |
| 20P | G5=30u"Gold |
| 22P | S0=Gold Flash/Tin |
| 24P | S1=3u"Gold/Tin |
| 26P | S2=5u"Gold/Tin |
| 30P | S3=10u"Gold/Tin |
| 34P | S4=15u"Gold/Tin |
| 36P | S5=30u"Gold/Tin |
| 40P | SN=Tin |
| 44P | |
| 50P | |

Ordering Information

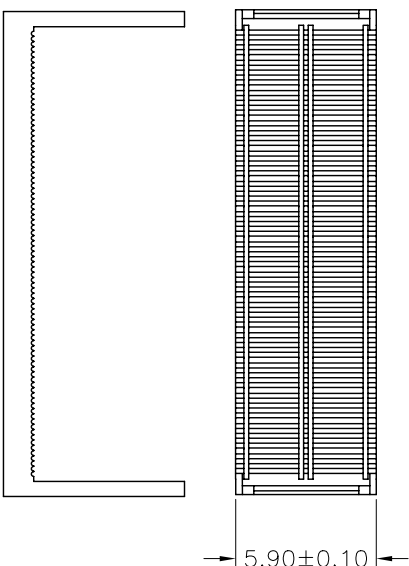

公差 (TOLERANCE)		绘图 (DRAWN)		投影 (PROJECT)		料号 (PART NO)		发行编号 (Issue No)	
X. ± 5°	X.			单位 (UNIT)	MM	5243-XXYBXXW01	页次 (PAGE)		
.X ± 2°	.X ± 0.38	校对 (CHECKED)		比例 (SCALE)	3:1			1/1	
.XX ± 1°	.XX ± 0.25	核准 (APPROVE)		版本 (EDITION)	A0				
.XXX ± 0.5°	.XXX ± 0.12			日期 (DATE)	06-12-28	品名 (NAME)			
						1. 27*2. 54 IDC 二件式带凸点			

ZYSZ INDUSTRY CO., LTD

REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK