
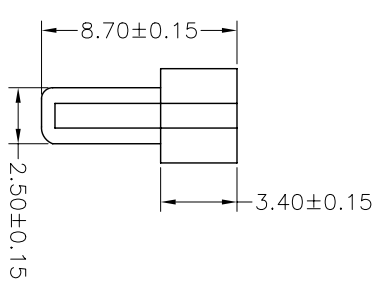


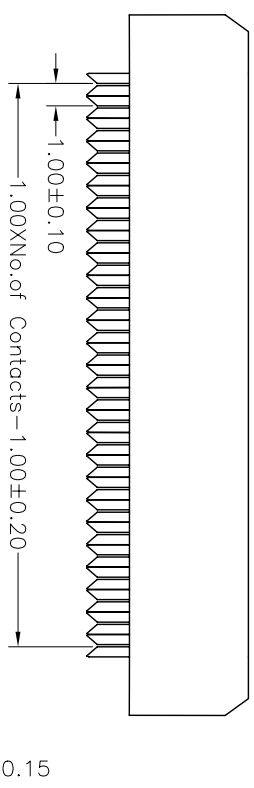


2.00mm (0.0787") I. D. C SOCKET WITHOUT POLARIZATION BUMP

REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK

SPECIFICATIONS

Current Rating: 1.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over 50u" Ni
 Insulator Material: PBT+30%GF (UL94V-0)

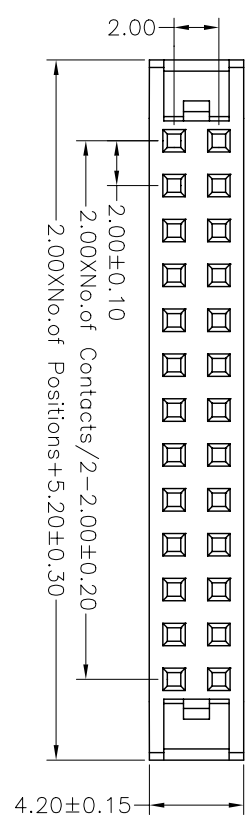

Ordering Information

5222-XX YP XX XXX

No. of Pins	Contact Plating:
10P 60P	G0=Gold Flash
12P 62P	G1=3u"Gold
14P 64P	G2=5u"Gold
16P 68P	G3=10u"Gold
20P	G4=15u"Gold
22P	G5=30u"Gold
24P	S0=Gold Flash/Tin
26P	S1=3u"Gold/Tin
30P	S2=5u"Gold/Tin
34P	S3=10u"Gold/Tin
36P	S4=15u"Gold/Tin
40P	S5=30u"Gold/Tin
44P	SN=Tin
50P	

公差 (TOLERANCE)		绘图 (DRAWN)		投影 (PROJECT)		料号 (PART NO)		发行编号 (Issue No)	
X. ± 5°	X.	校对 (CHECKED)	核准 (APPROVE)	单位 (UNIT)	MM	5222-XXYBXXN01	1/1	2.00 IDC	无凸点
.X ± 2°	.X ± 0.38			比例 (SCALE)	3:1				
.XX ± 1°	.XX ± 0.25			版本 (EDITION)	A0				
.XXX ± 0.5°	.XXX ± 0.12			日期 (DATE)	06-12-28				

ZYSZ INDUSTRY CO., LTD